

Contents


Control Unit x 1




Chain x 1



Profile and Control Rod x1



Twist & Lock Cord Spools




Profile Width Spools

60cm to 75cm	2
90cm to 105cm	3
120cm to 135cm	4
150cm	5
180cm to 210cm	6
240cm	7
270cm to 300cm	8

End Cap x 1




Universal Brackets



Profile Width Brackets

60cm to 105cm	2
120cm to 150cm	3
180cm	4
210cm to 240cm	5
270cm to 300cm	6

Child Safety Device x 1



Bottom Bar x 1



Child Safety Toggles



Profile Width Toggles

60cm to 75cm	2
90cm to 105cm	3
120cm to 135cm	4
150cm	5
180cm to 210cm	6
240cm	7
270cm to 300cm	8




Roman Blind - Fixed Chain Instructions

Completely Safe


JONES

since 1909

1. Attach the blind to the profile.

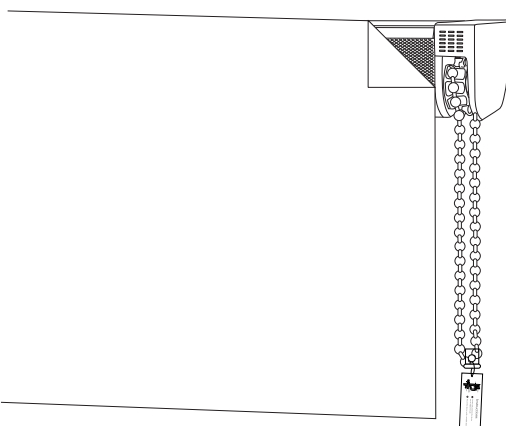


2. Align the cord spools and lock into place by hand.

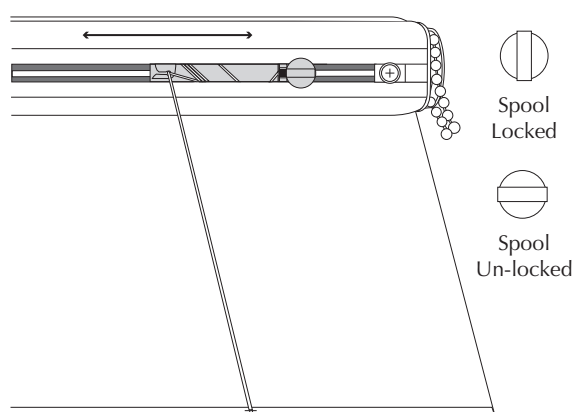


3. Attaching Child Safety Toggles

Attach the Child Safety Toggle to the lowest contact point on the blind. Thread the cord through the toggle and adjust the length. Do not tie a knot in the cord, below the toggle.

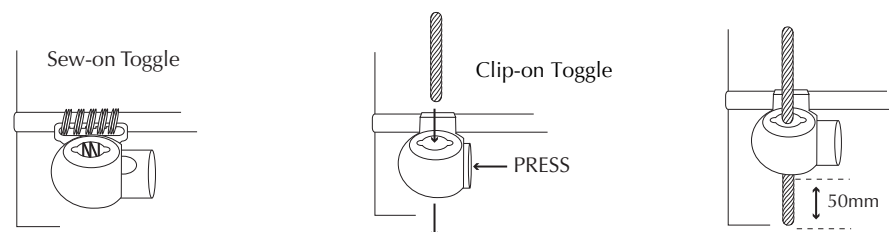


4. Bracket Spacing

Place the blind in the fitting position and space the brackets evenly.

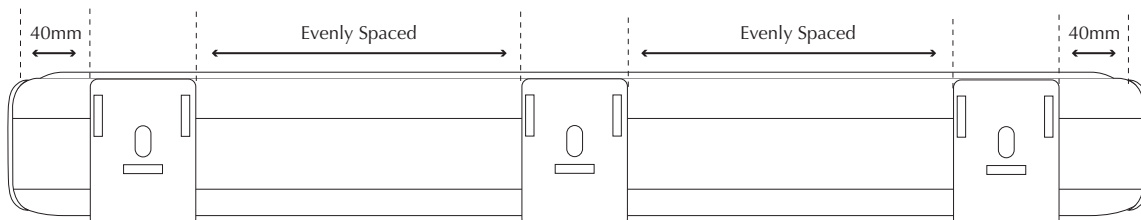

5.a Installing Universal Brackets

1. Secure the brackets using the fixings provided.
2. Hook the profile onto the bracket as shown below
3. Use the lever to lock the bracket

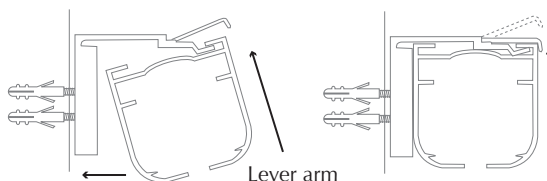



5.b Installing Easy Fit Brackets

1. Secure the brackets using the fixings provided.
2. Hook the profile onto the bracket as shown above
3. The brackets will click, locking the profile in place.

6. How to make your Blind Child Safety Compliant

Slide the chain through the bottom of the Child Safety Device and secure to the wall using the fixings provided ensuring the chain remains taut.

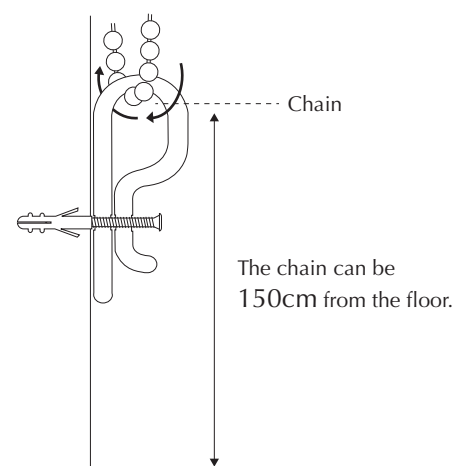

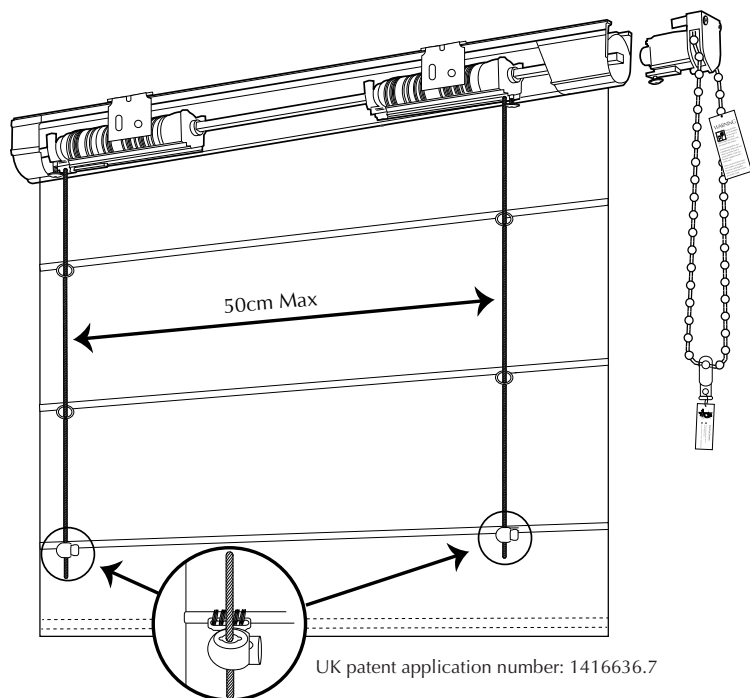


Simple steps to blind compliance

Jones Interiors Cassette System Check List

- 1 All Warning Labels are attached. ✓
- 2 The Chain is at least 150cm above the ground and fixed to the wall with our (H700CSD) Child Safety Device ✓
- 3 The Child Safety Toggles are fitted. ✓

If all the above items are ticked your blind will be compliant with BSEN13120:2009+A1:2014.

WARNING



Young children can be strangled by the loops, pull cords, chains, tapes & inner cords that operate this product.

To avoid strangulation and entanglement, keep cords and chains out of the reach of young children. Cords may become wrapped around a child's neck.

Move cots and furniture away from window covering cords and chains. Do not tie cords together. Make sure cords do not twist and create a loop.

Roman Blind Systems

Our Fixed Chain Cassette Systems include our new Child Safety Toggle, designed and developed by Jones Interiors. This exclusive product allows you the freedom to use Brass Rings (H66), Polycarbonate Rings (H362), or Cording Eyelets (H4031) to utilise your preferred method of manufacture. Each Toggle has a maximum lift capacity of 1kg so please consider the number of cords you might need for any heavy blinds. We recommend a maximum spacing of 50cm between cords. These new Toggles must be sewn to the lowest cord attachment points across the bottom of your blind (see above diagram) - we recommend Güttermann heavy duty core spun thread (A782). We have had all these methods independently tested and verified to BSEN13120:2009+A1:2014.

Operating Chains

Without the installation height, the maximum chain length we can supply is 100cm. These chains must then be attached using our chain safety device (H700CSD) and must be installed no lower than 150cm from the floor minimise the risk of strangulation.

The above chain sizes are not always convenient for every customer so as an alternative, we offer our Chain Release Control Unit with made to measure blinds and blind kits. This clever, child safe unit will release the chain when a force of 6kgs is applied, avoiding the risk of strangulation and in turn, allows the chain to sit no less than 60cm from the floor. These Chain Release units are available in Fast Lift (1:1 Gearing) or Heavy Lift (1:3 Gearing).

For those customers preferring the security of using continuous chains only, we now offer a much wider range of shorter drop sizes for your convenience. Please see pages 216 for full details in our Product Guide 8.

If you have any queries you can call our friendly sales team for support
0115 9738 708