

**UK Version
December 2005**

ASSEMBLING INSTRUCTIONS

Silent Gliss 5800

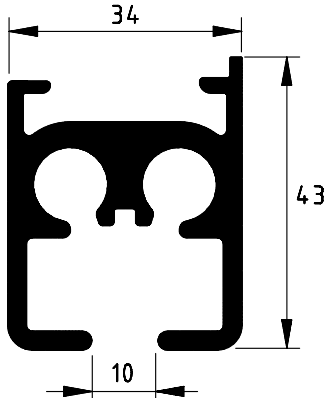
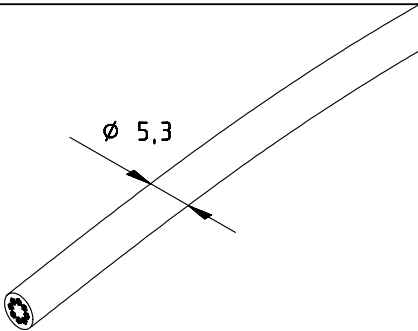


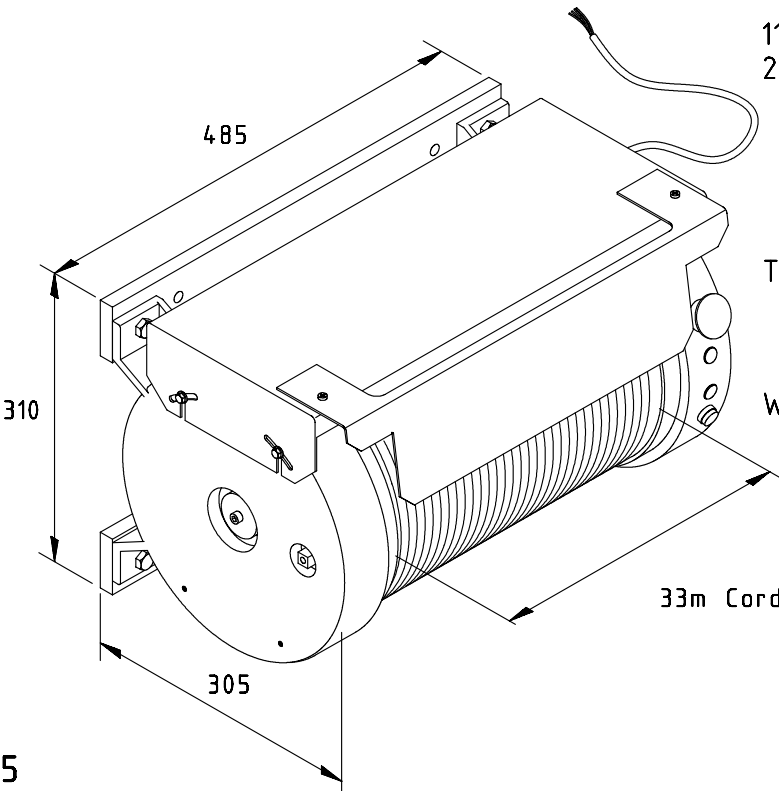


TABLE OF CONTENTS PRODUCT CHARACTERITICS







2




PRODUCT CHARACTERITICS	2
PART LIST	3 - 5
PREPARE THE PROFILE	6
FITTING OF PROFILE	7
ASSEMBLING	8-17
FIX COVER	18
WALL FIXING	19
SET CURTAIN POSITIONS	20
OPTION	21
LOAD TABLE	22 - 23
WIRING DIAGRAM	24

- for very haevy curtains
- max. length 2 stacks = 60m, 1 stack = 30m
- max. curtain weights = 280kg (see load table)
- stacking: single, pair and mulitple symmetrical systems
- curtain travel speed: 20cm per second
- motor for floor or wall fixing
- crank operation in case of power failure

5810 	5814 
5816 	5815 
5805  110V 60Hz 550WATT 5 Amp 230V 50Hz 500WATT 2,2Amp Torque 200N/m Weight 30kg 33m Cord	


PART LIST

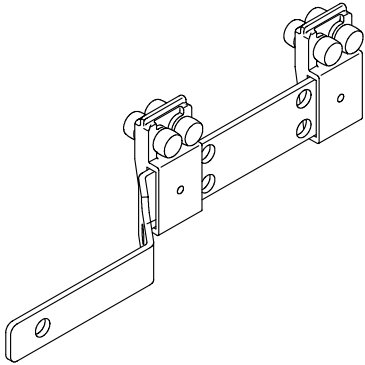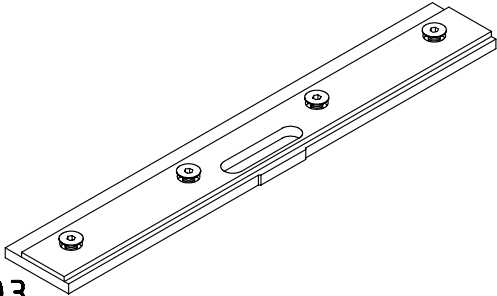 5806	 5809
 5824	 5811
 6203	 6209

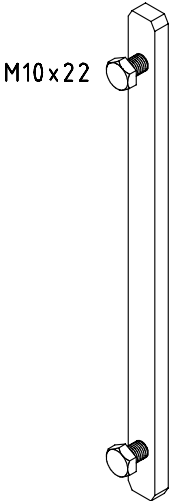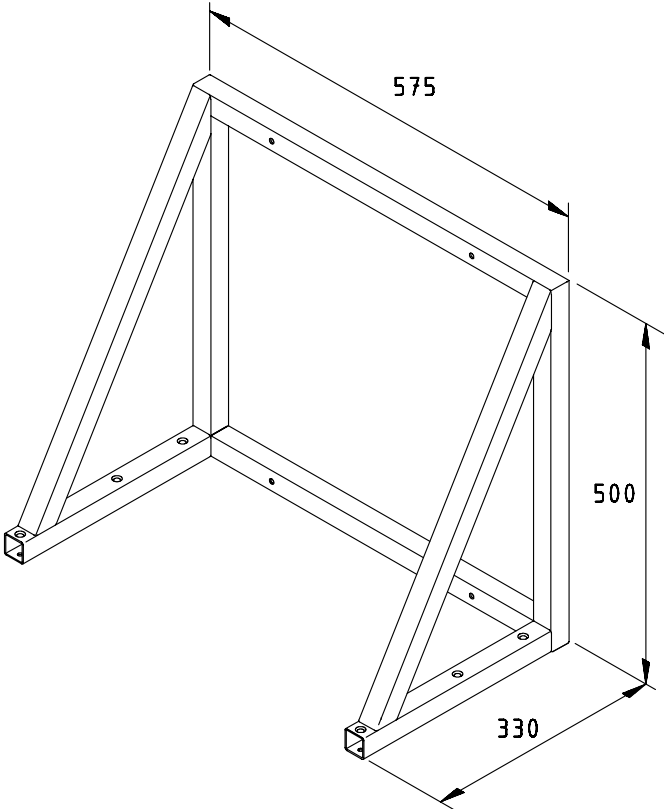 M10x22 5822	 5821
 5813	


PREPARE THE PROFILE


6

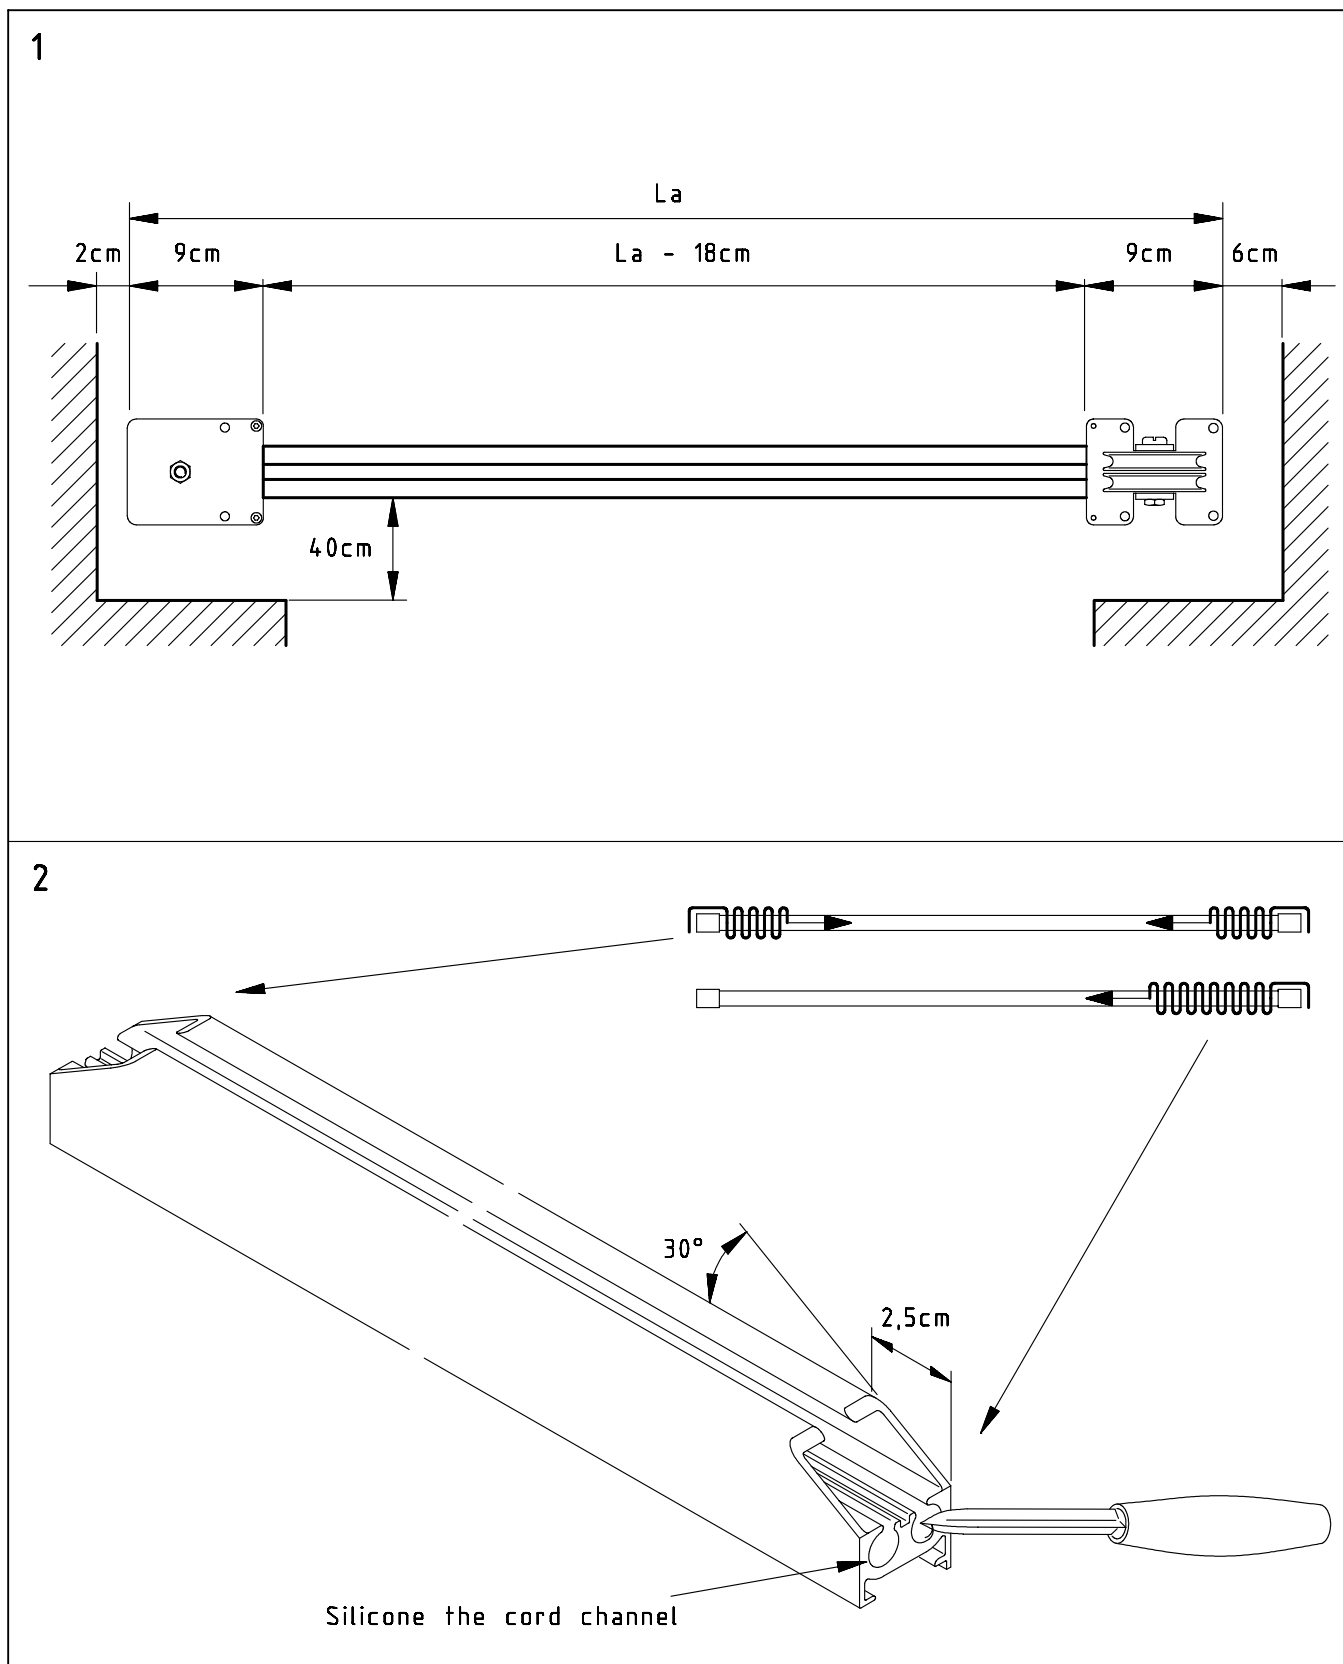



FITTING THE PROFILE


7

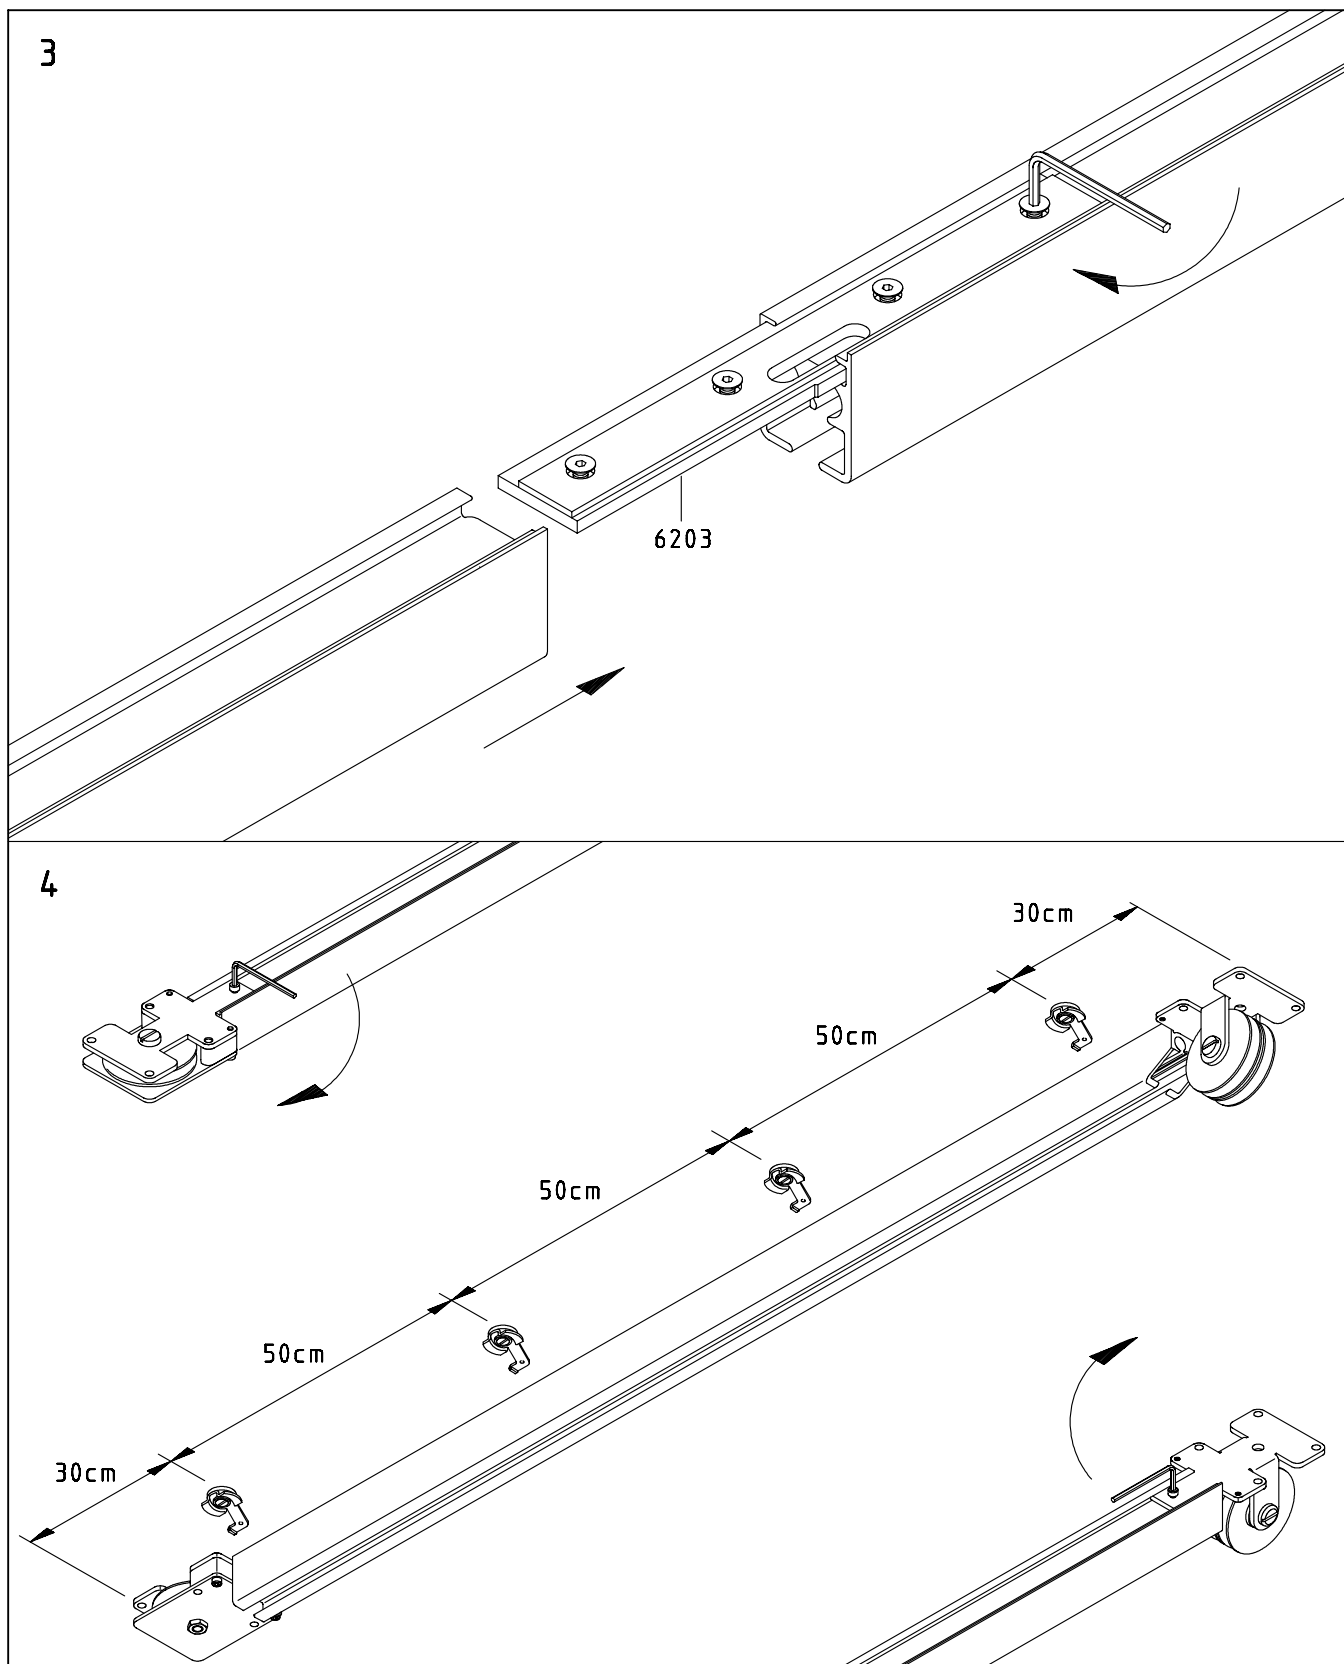


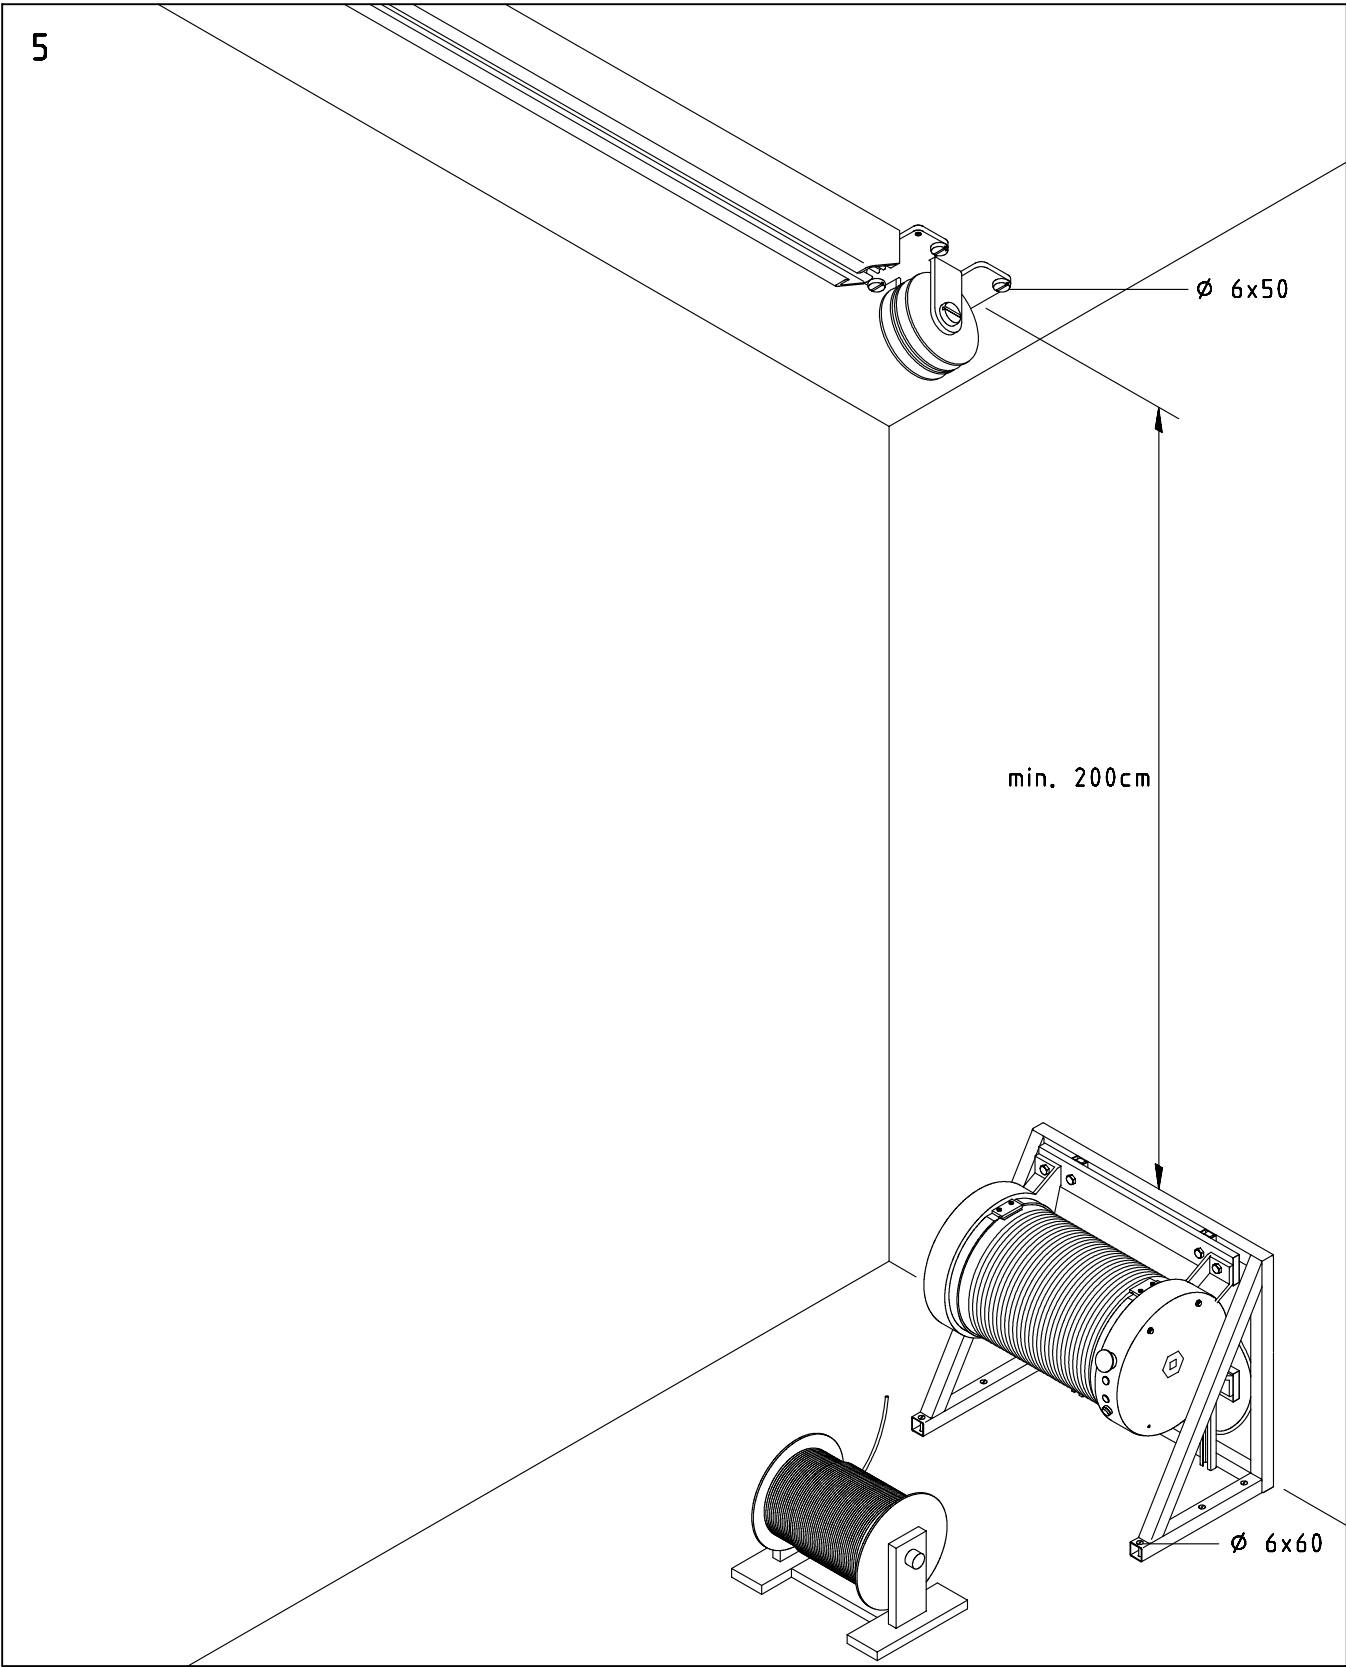


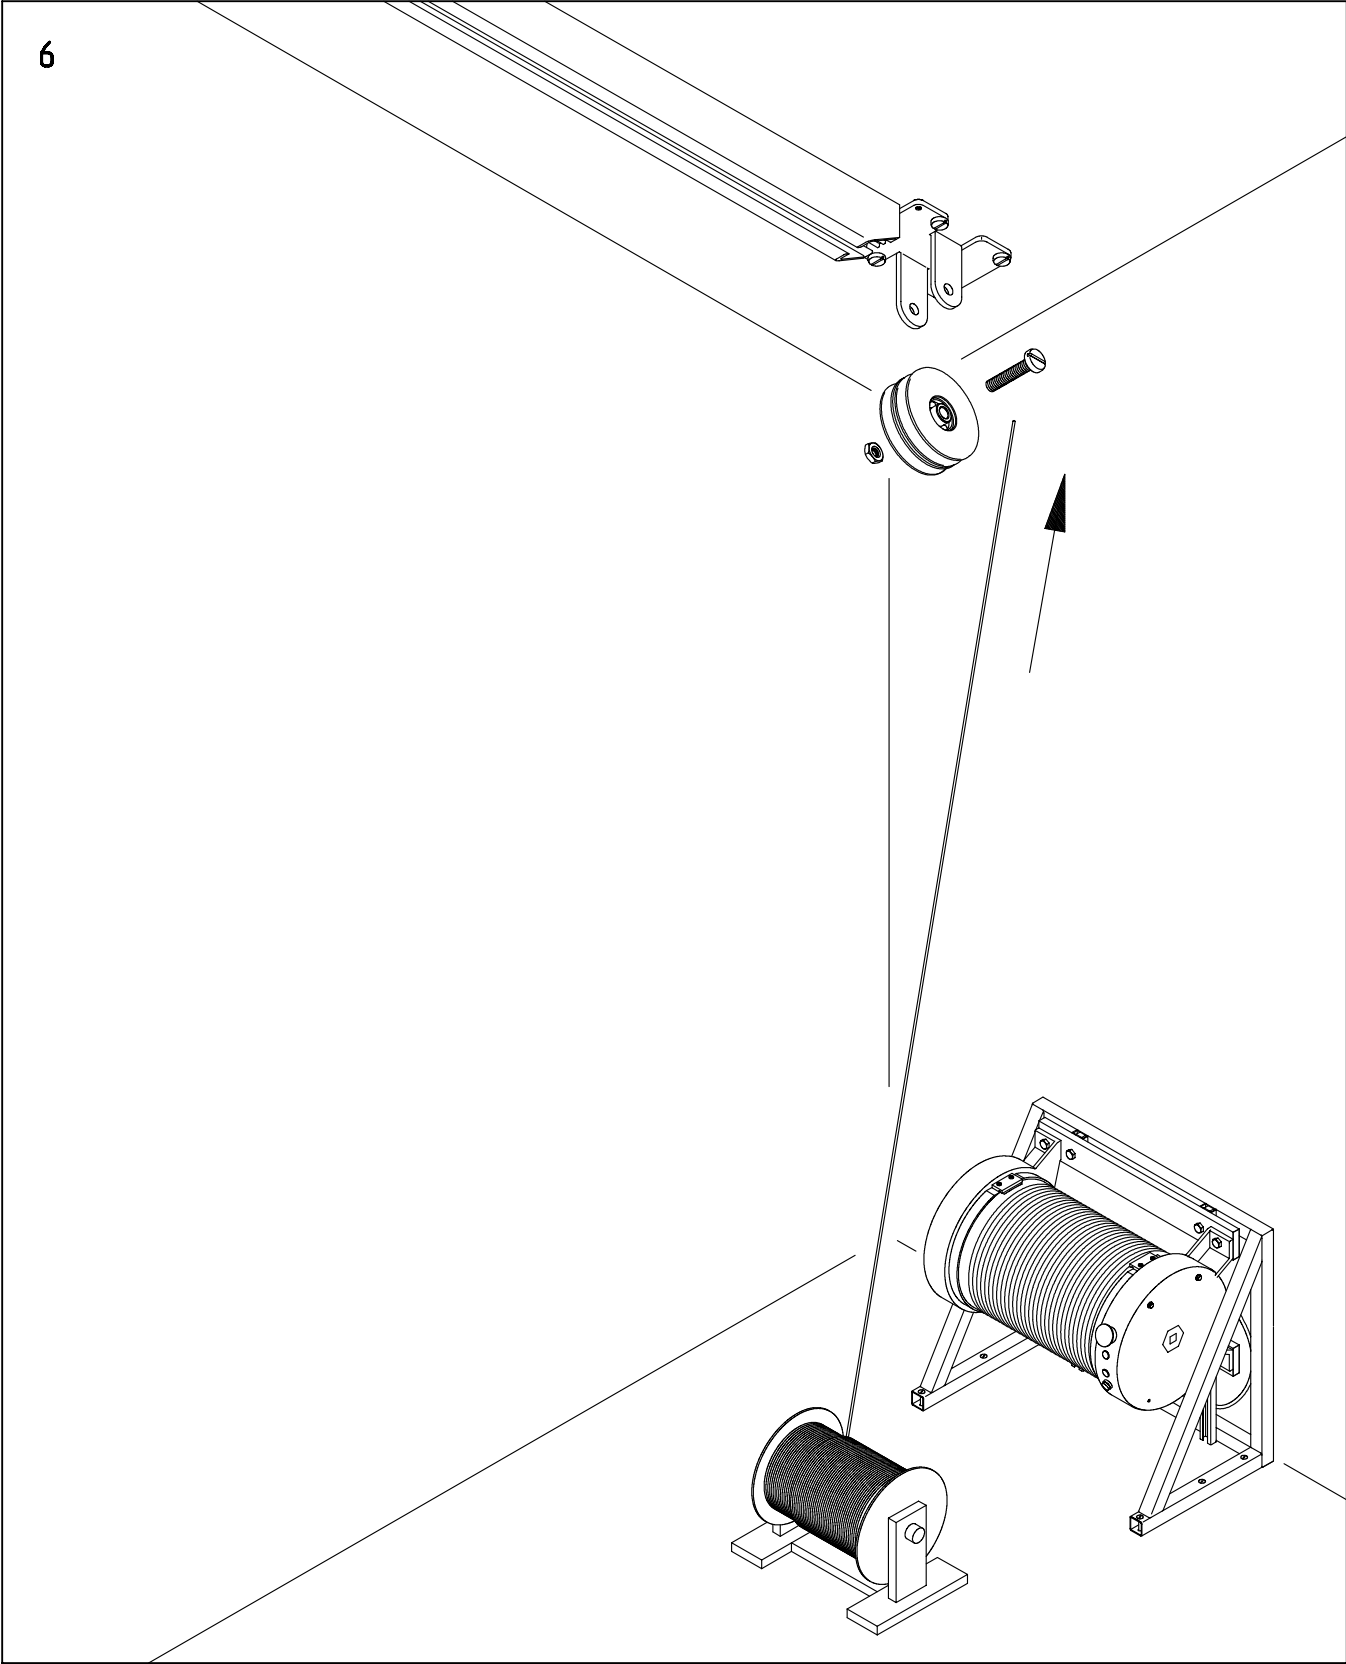

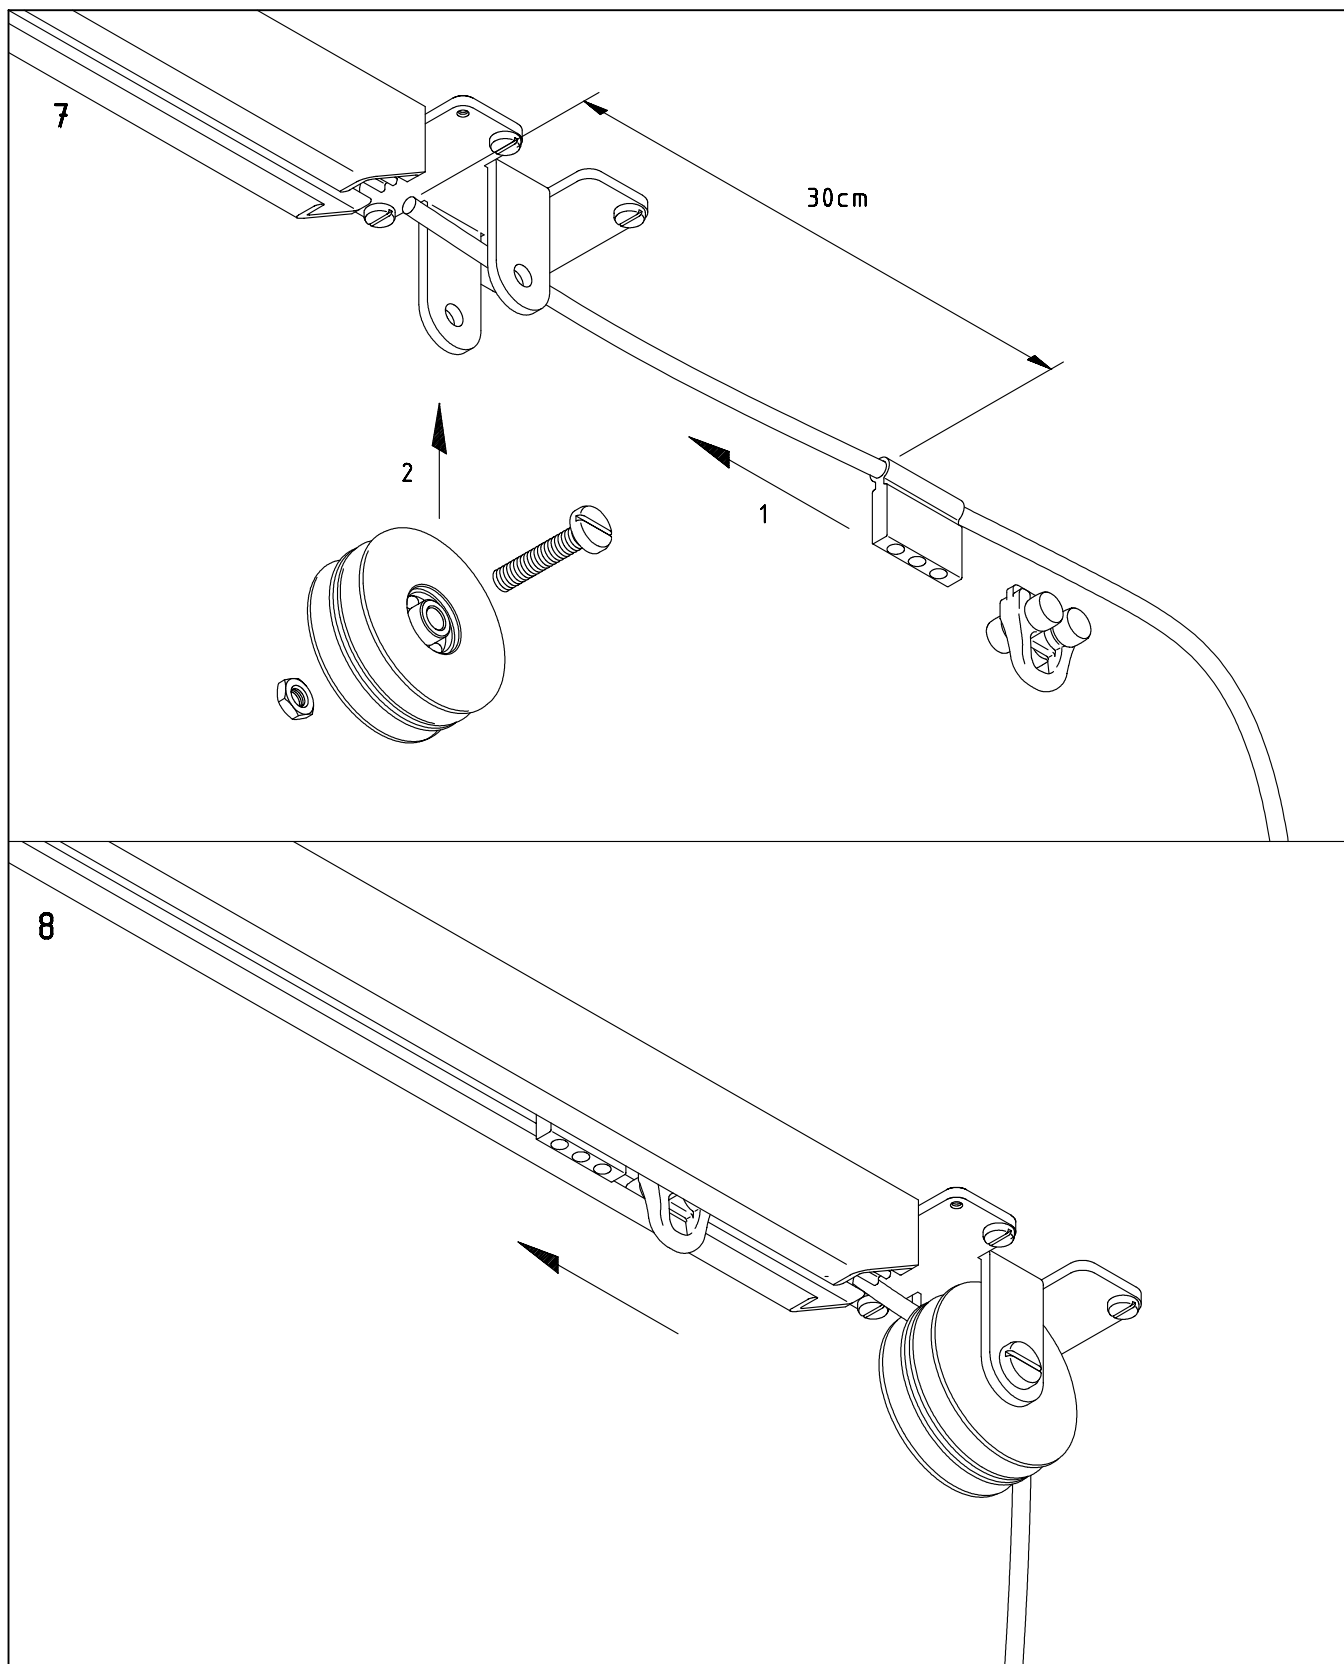


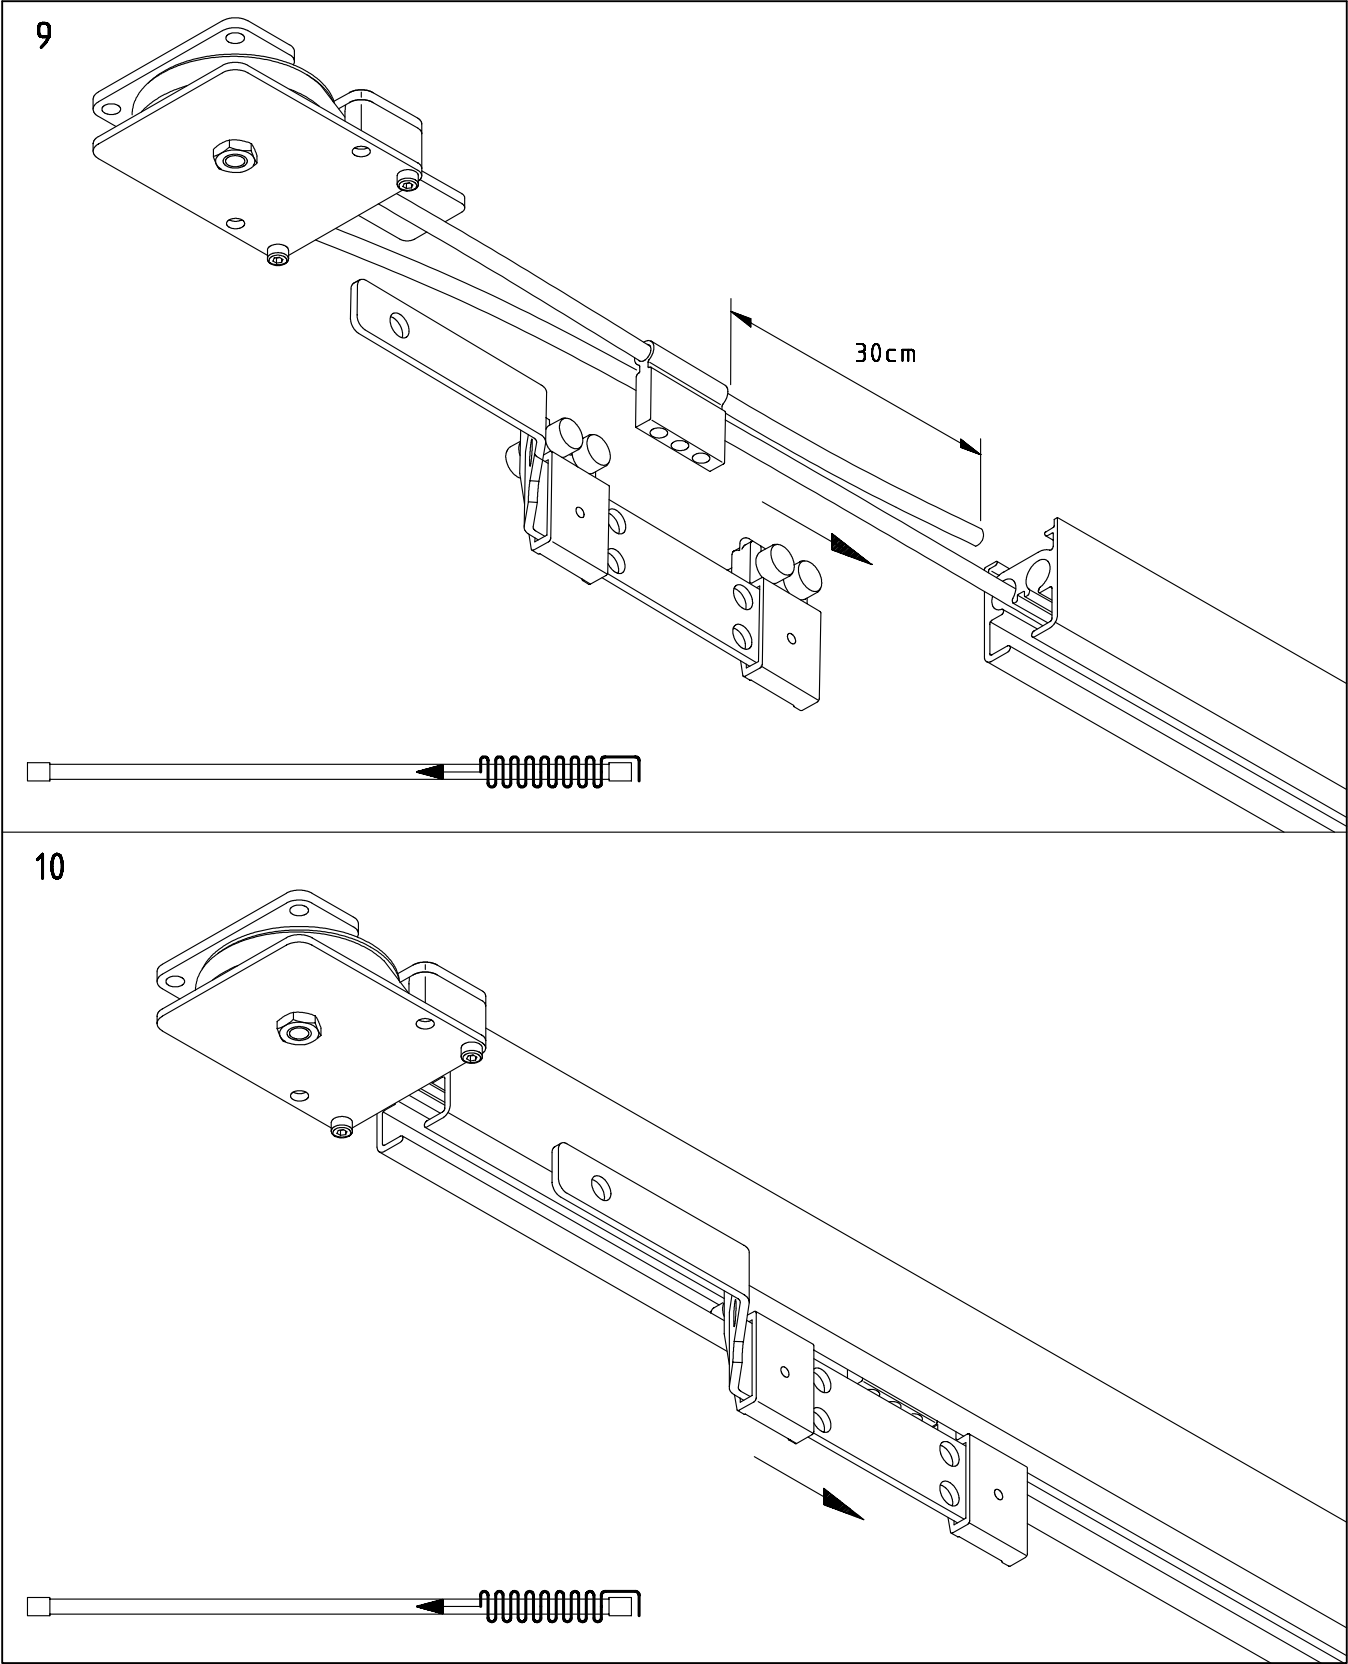


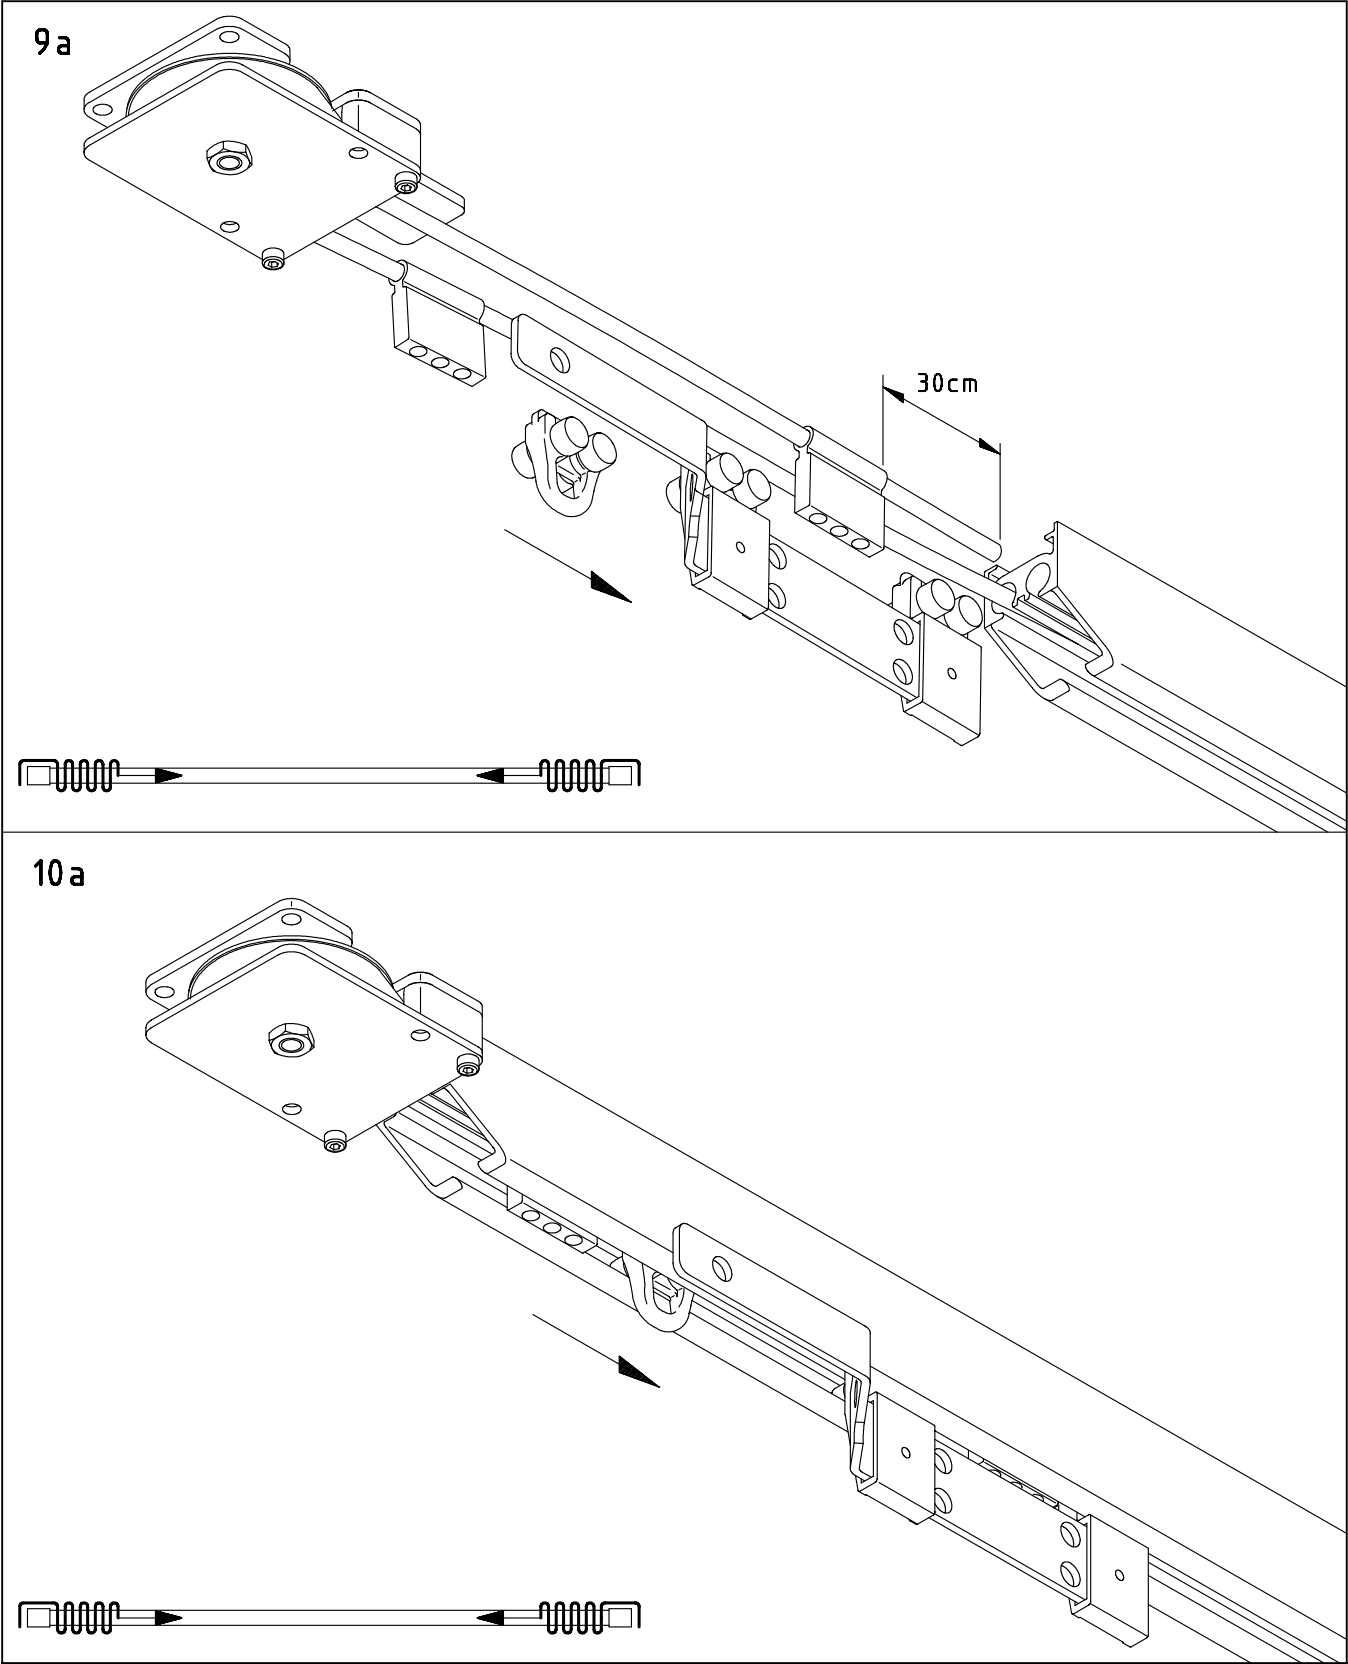


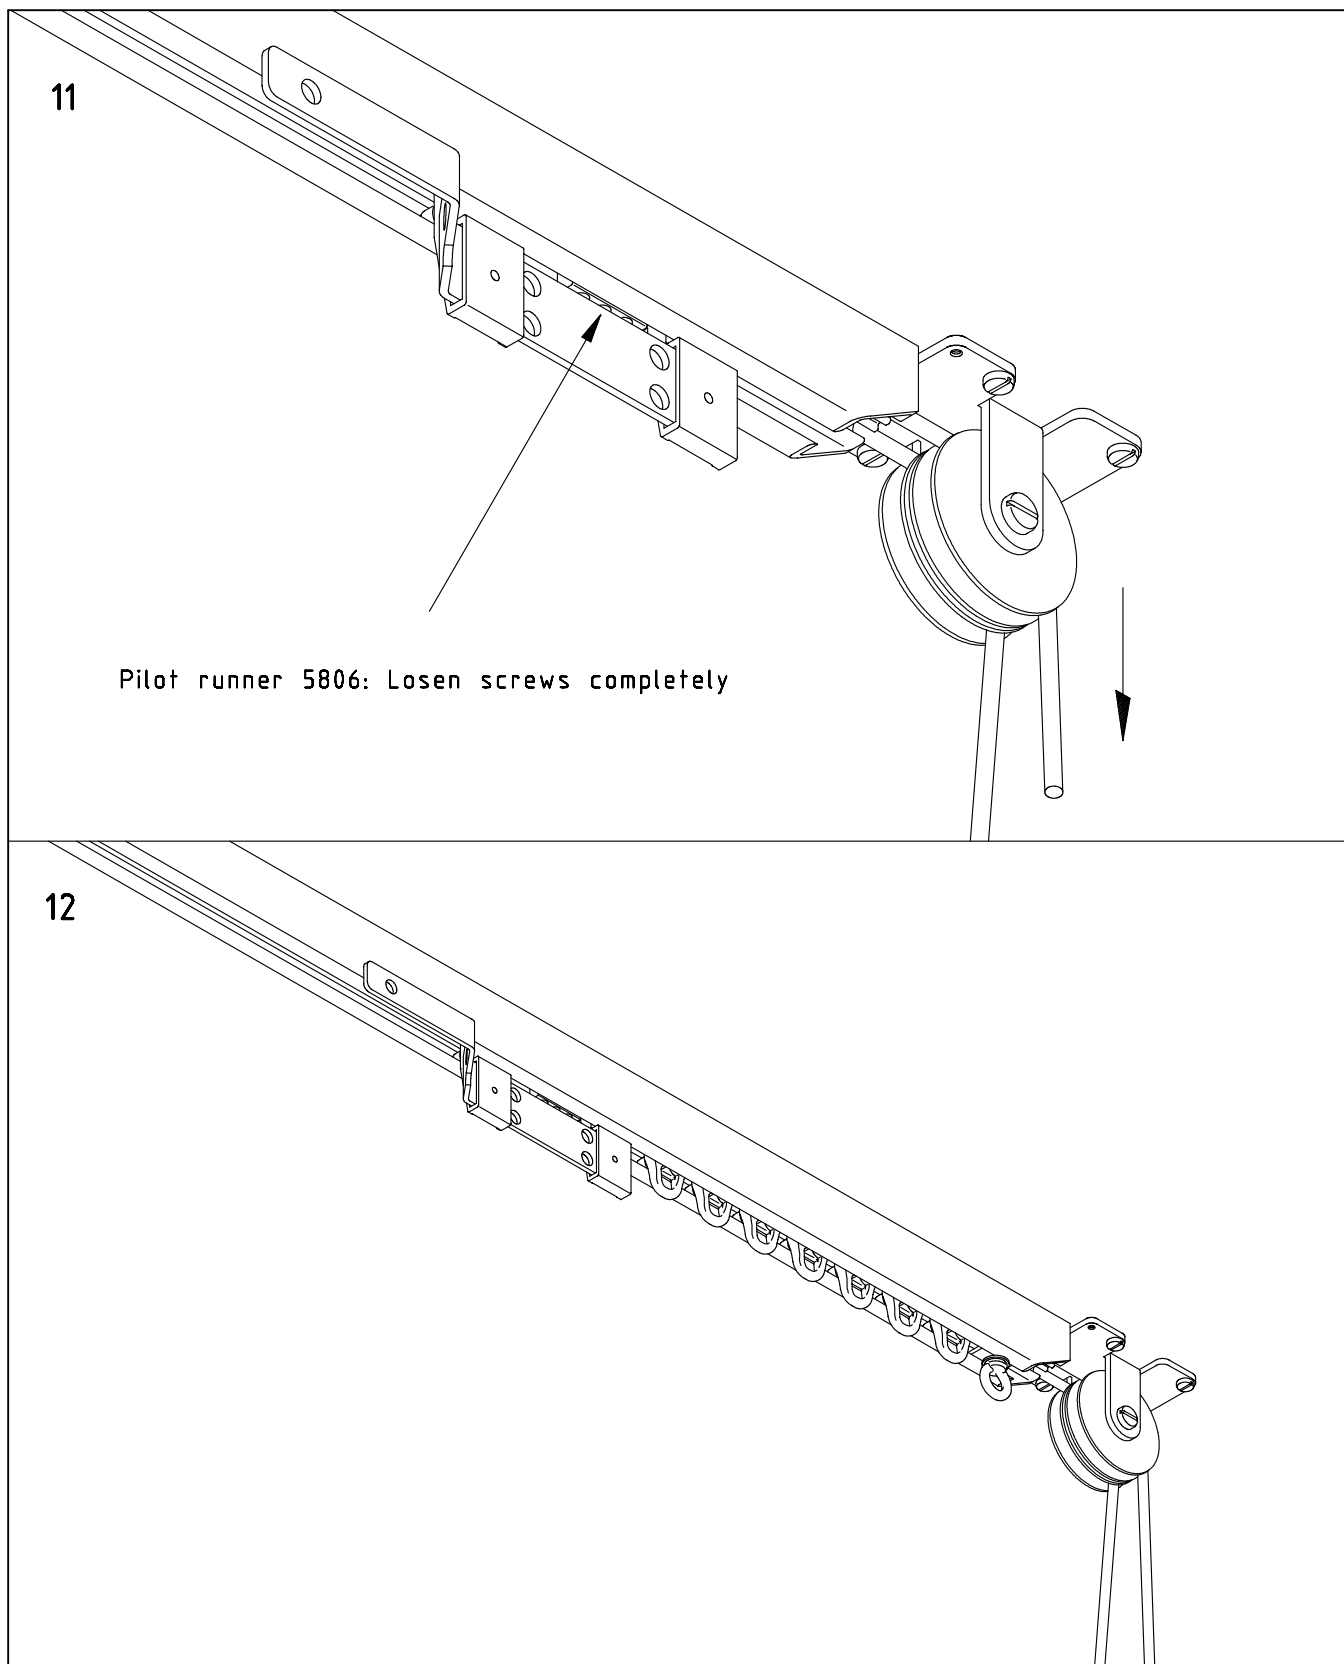



13

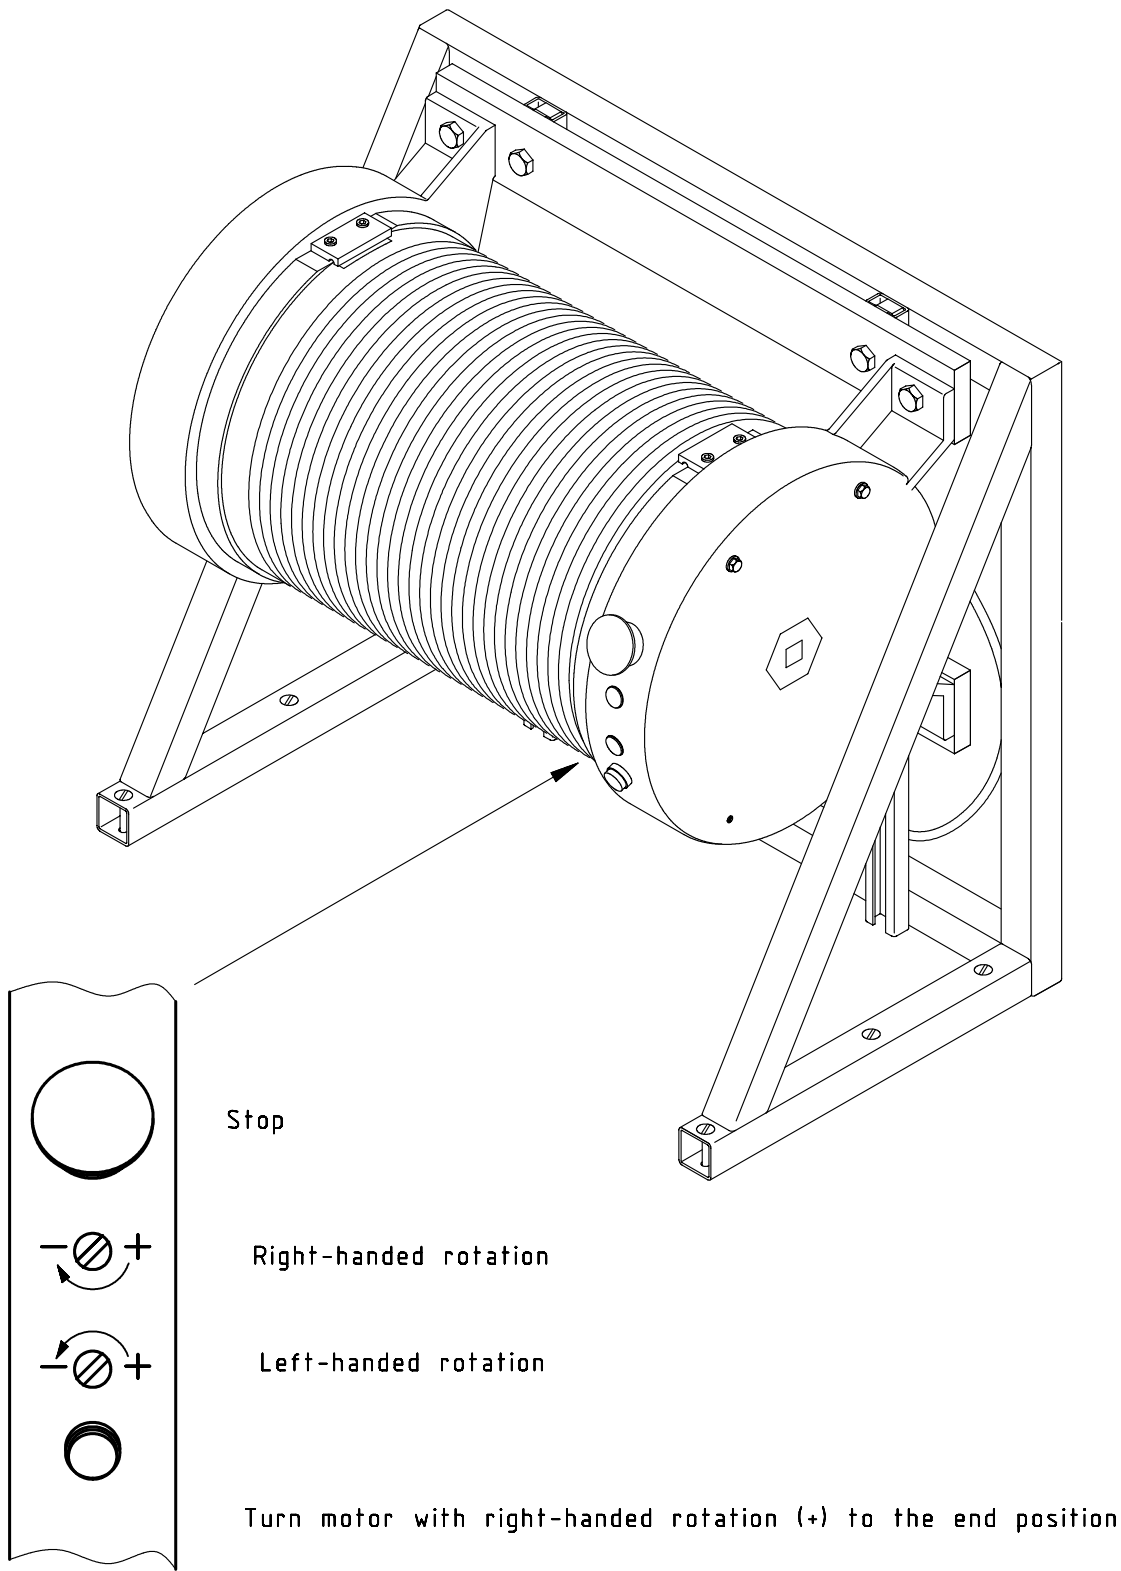


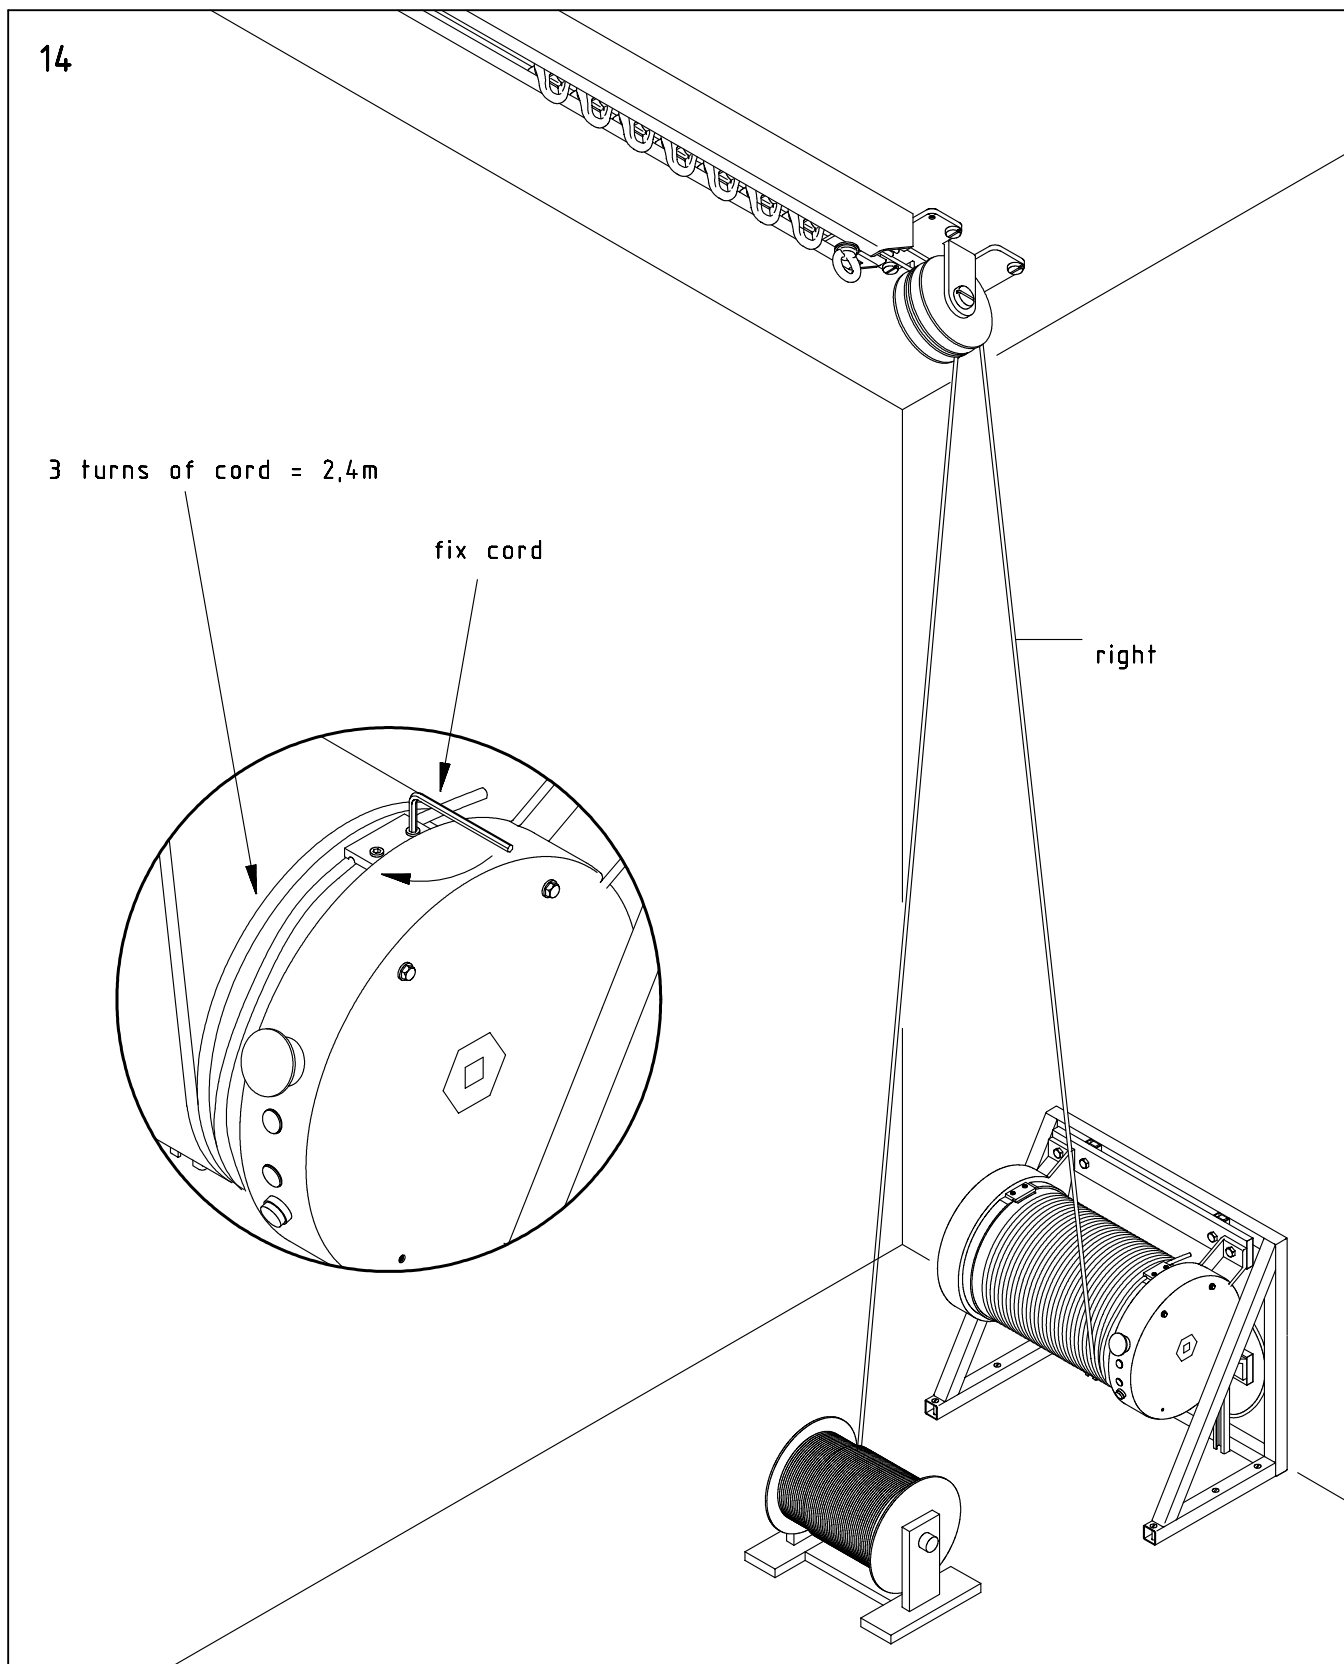


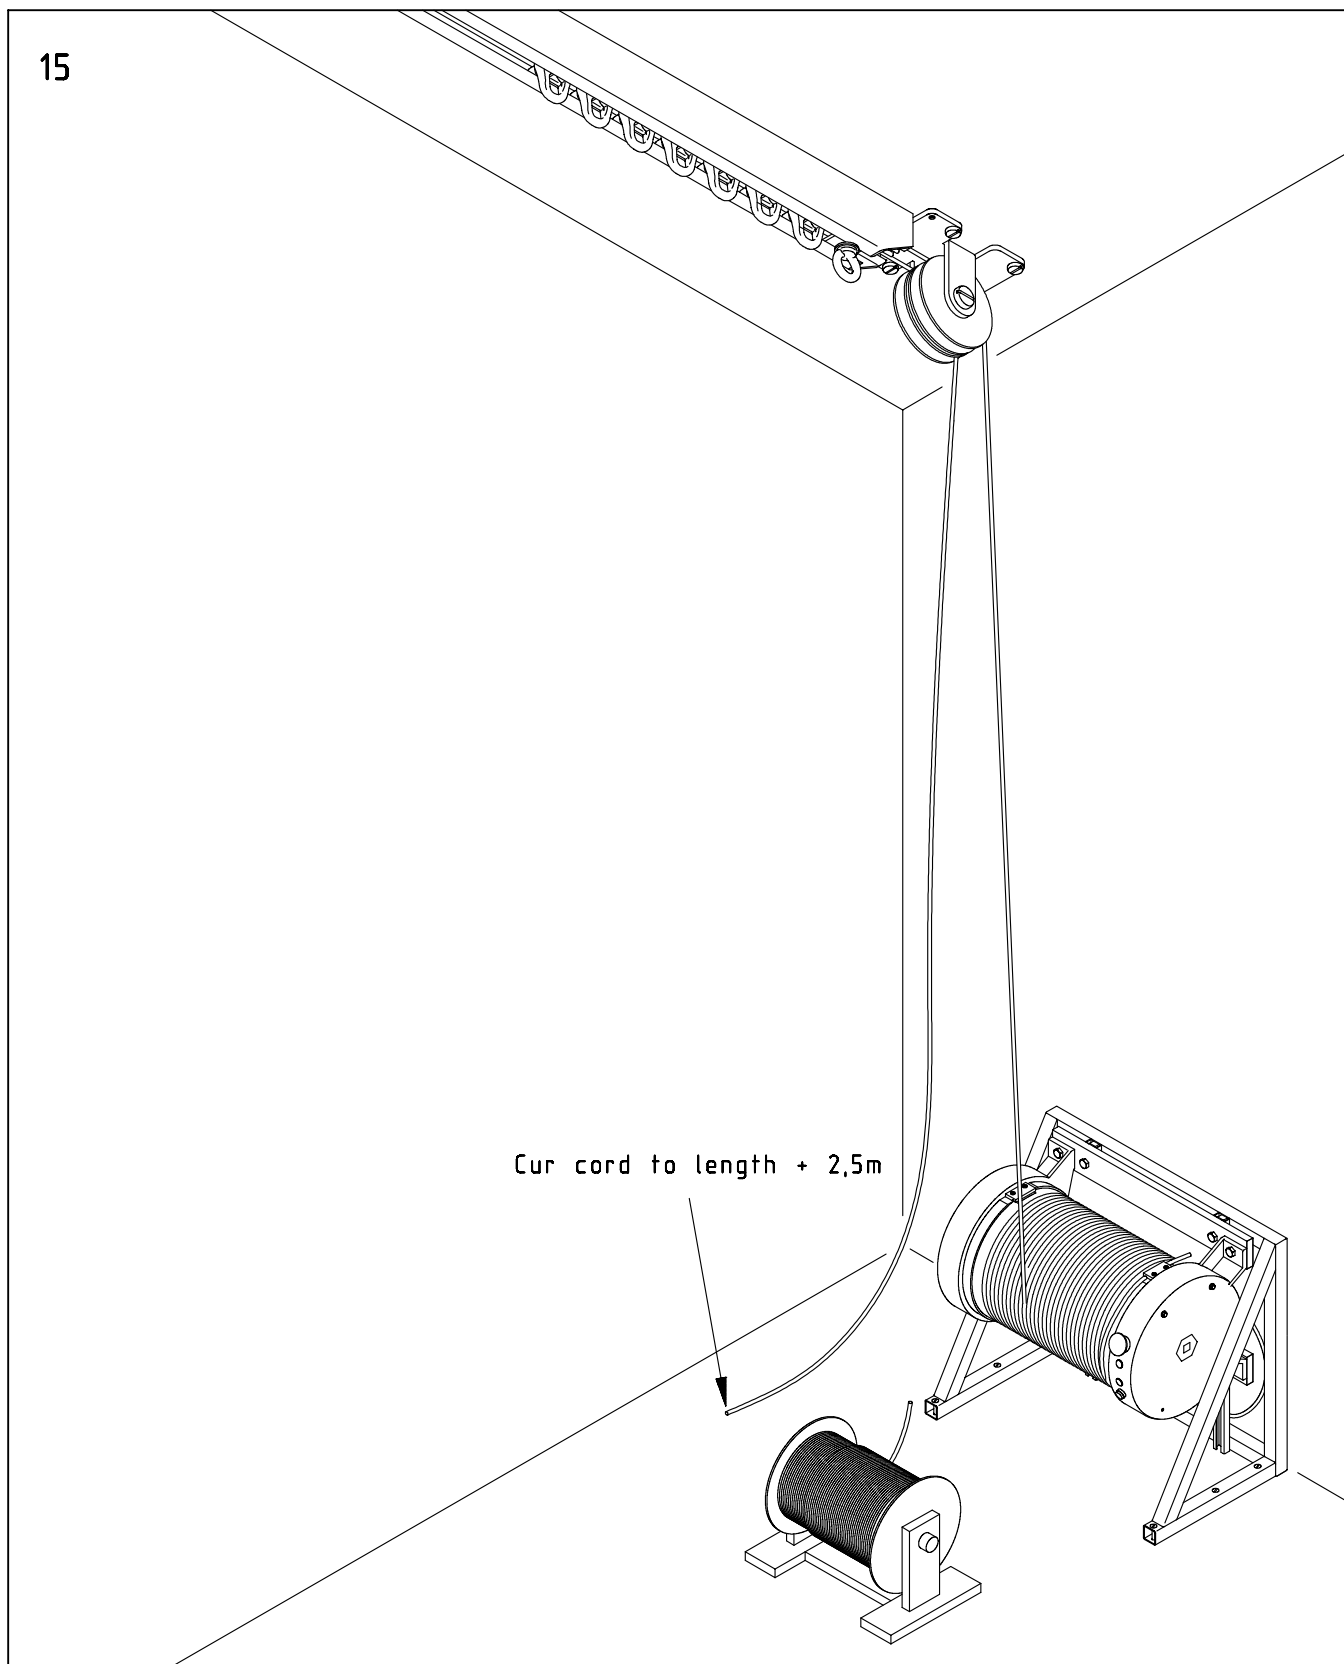


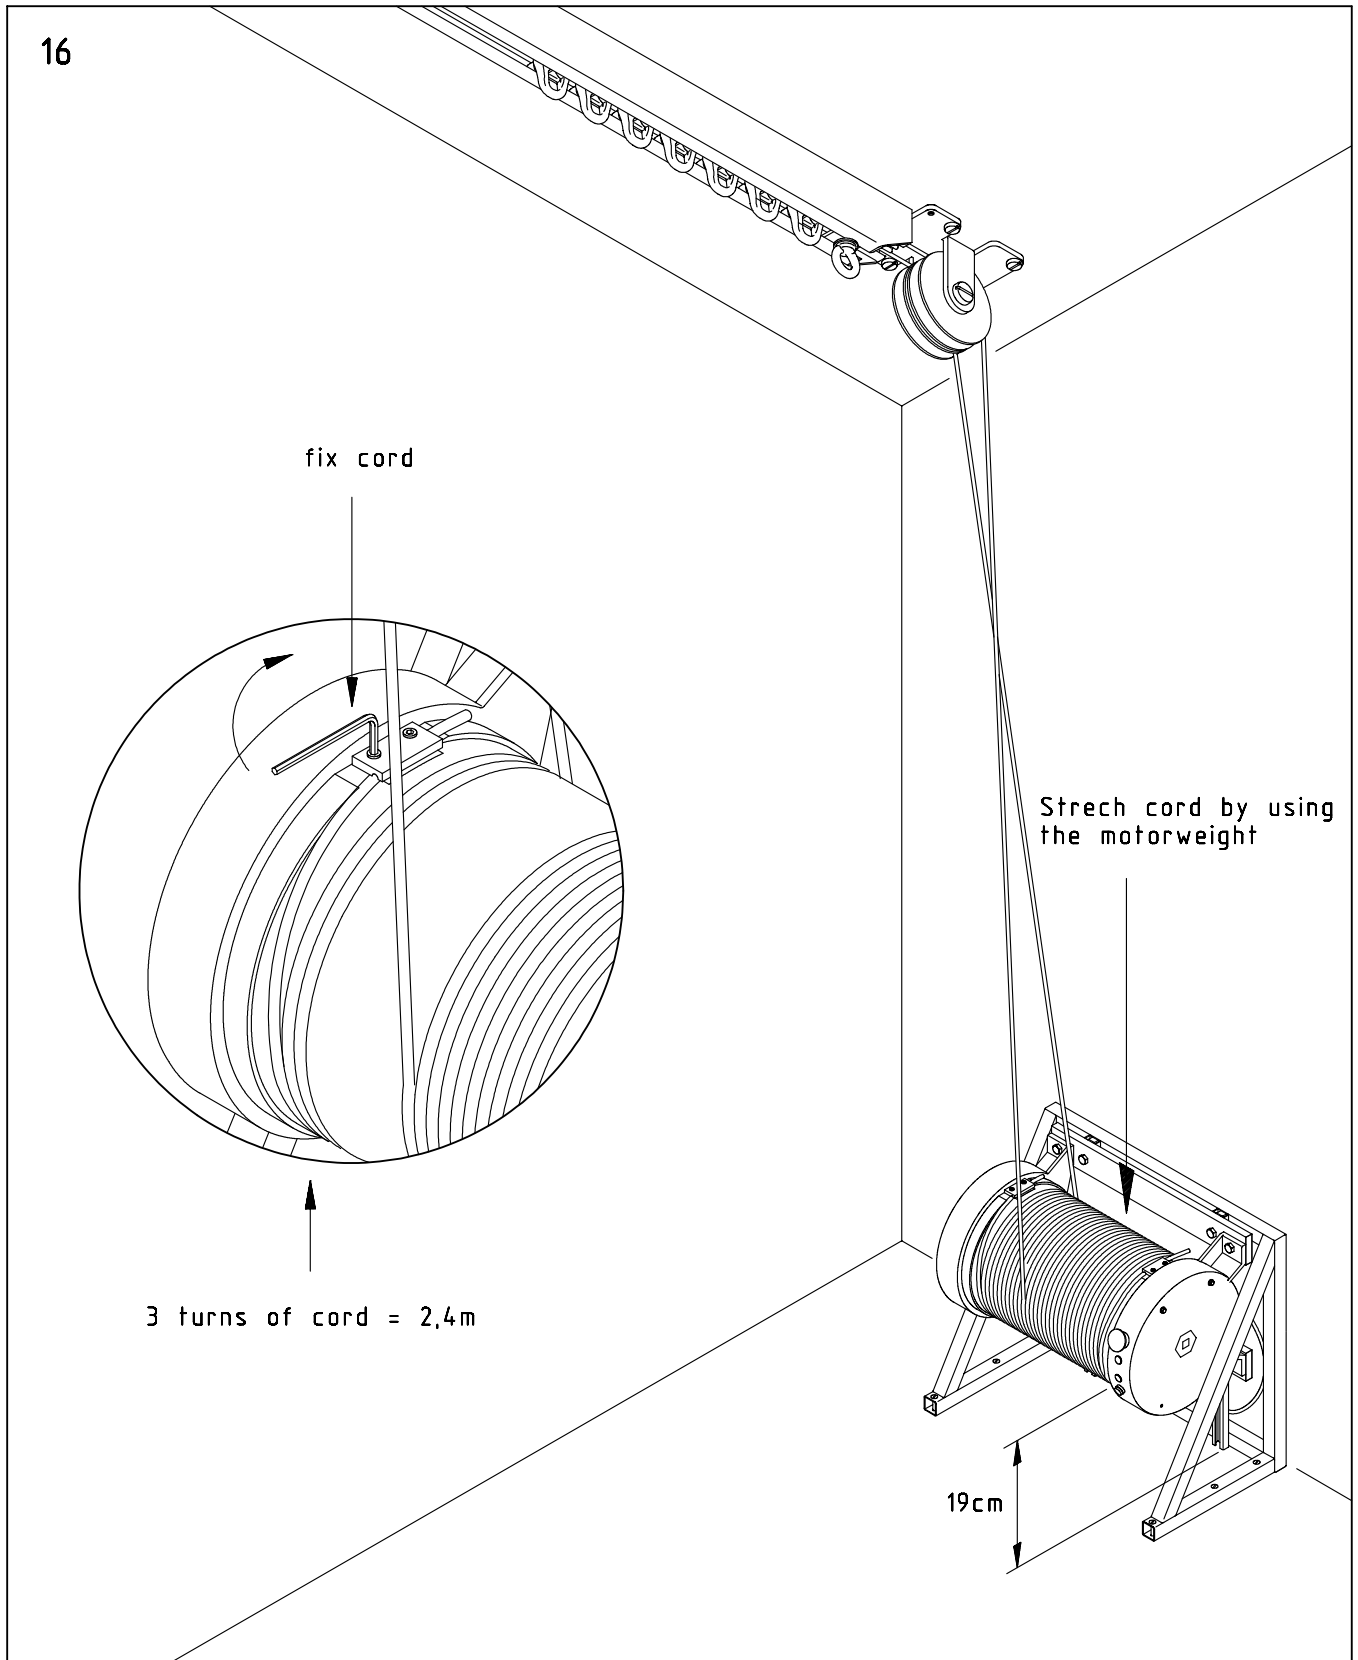

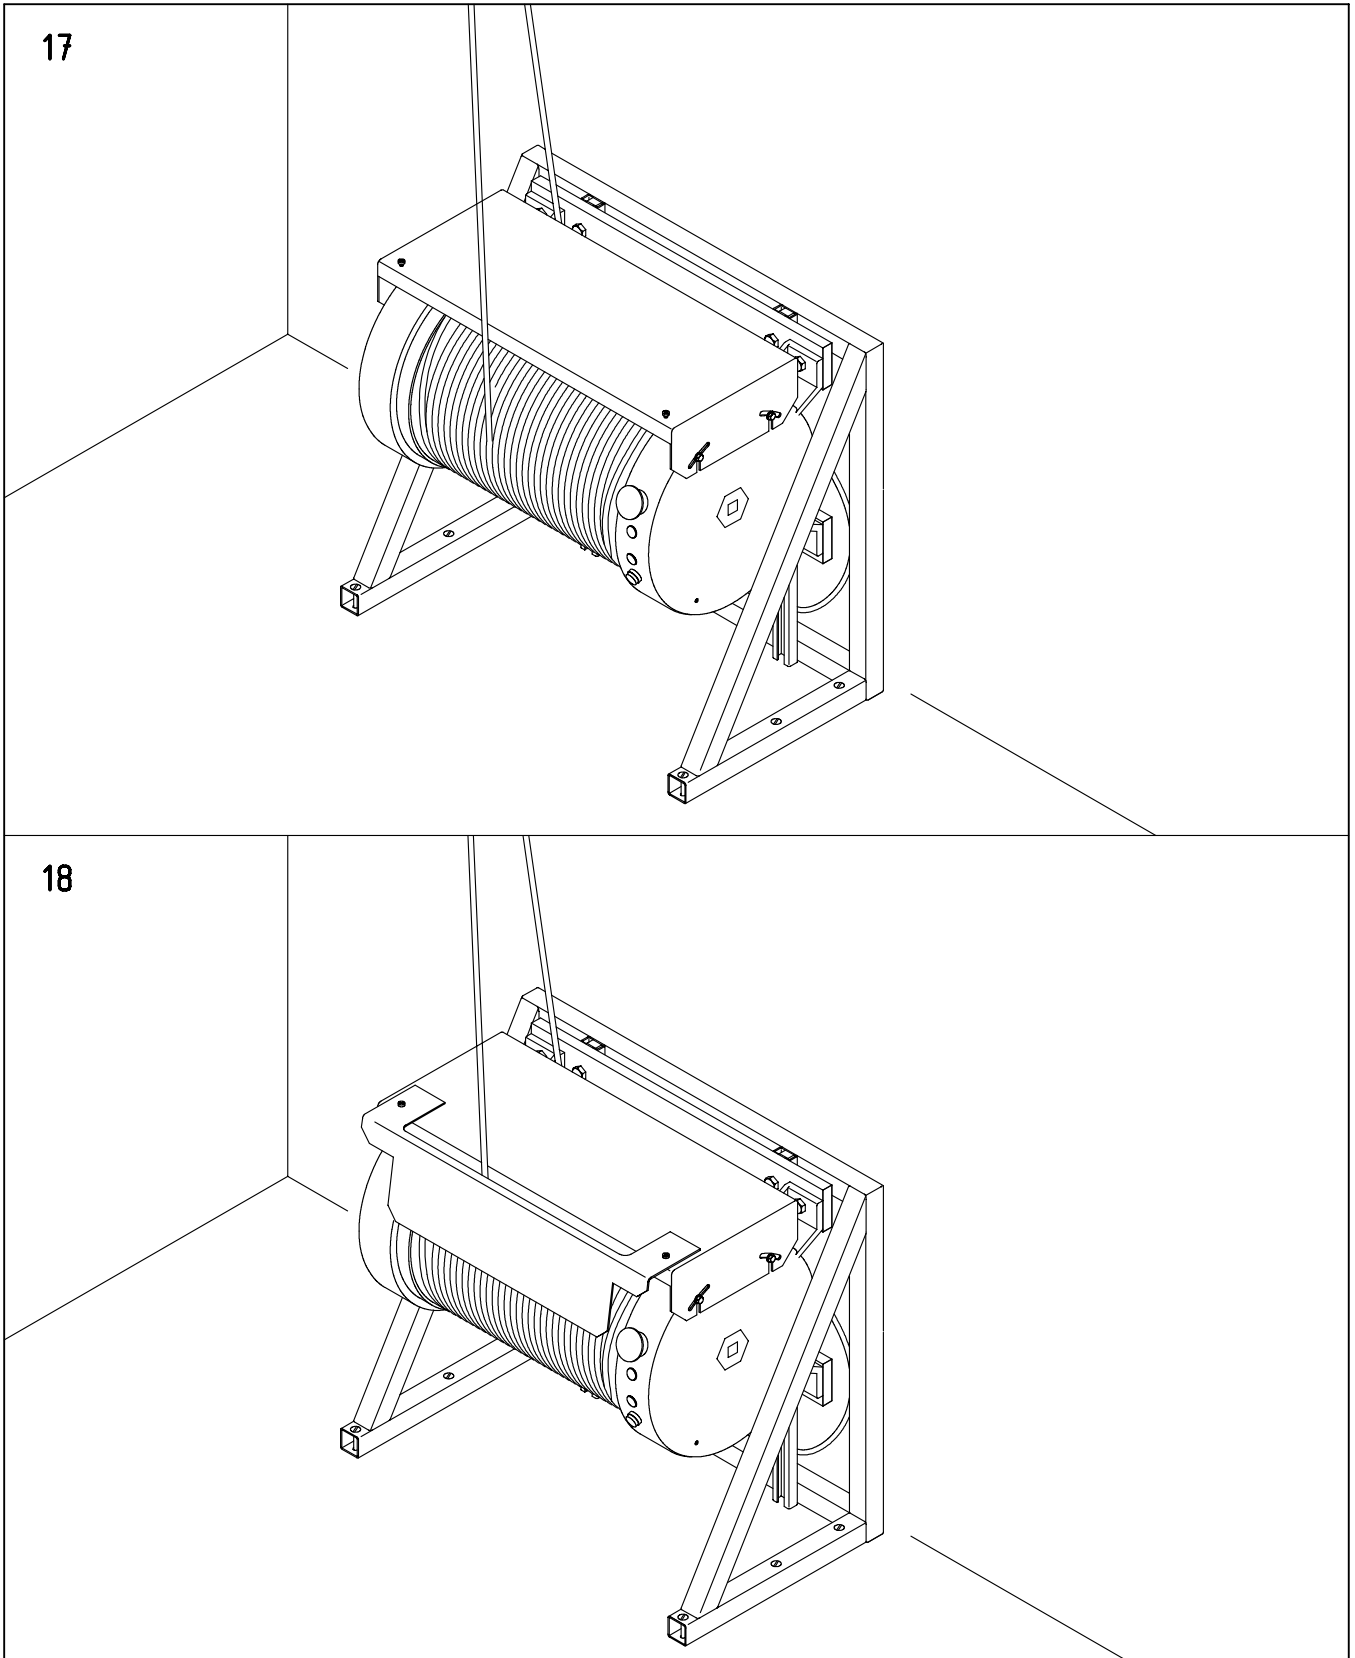

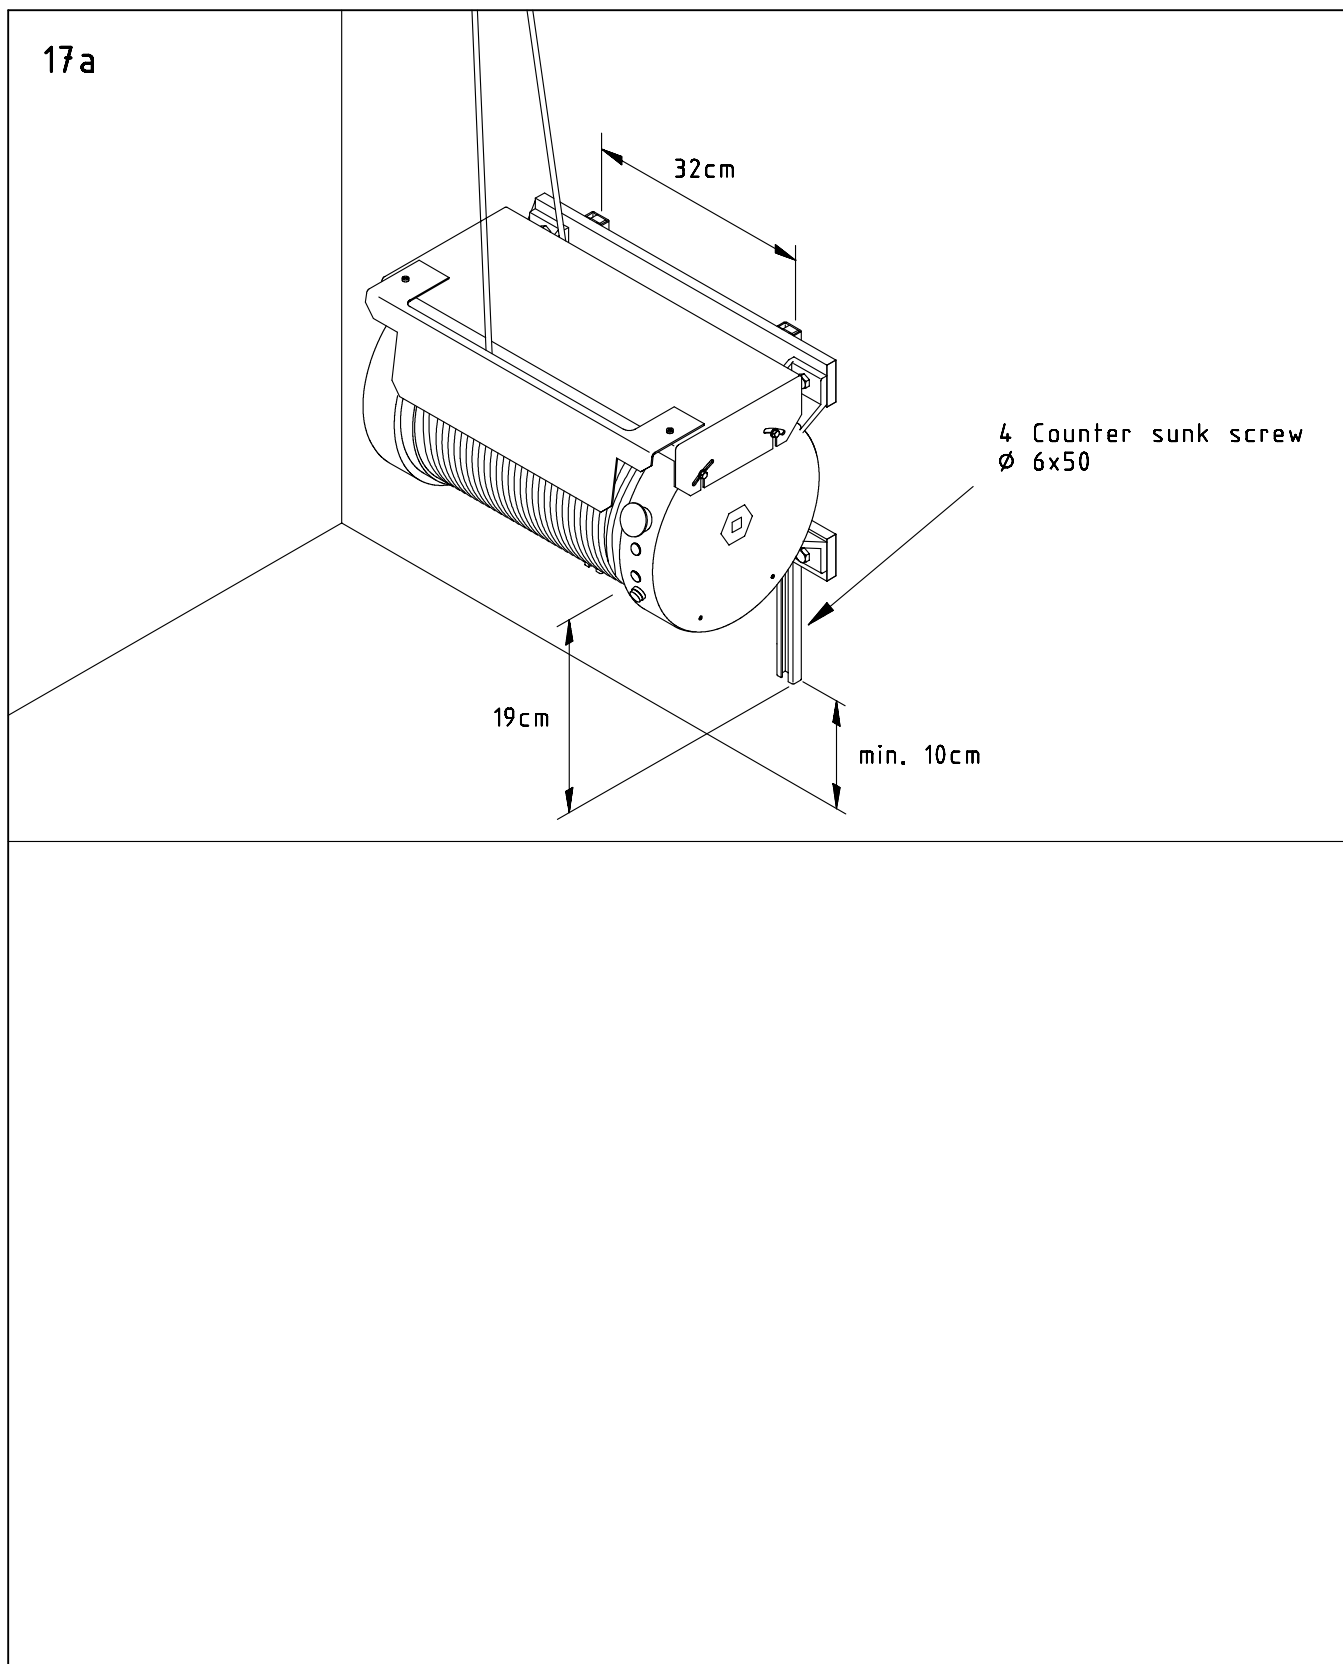


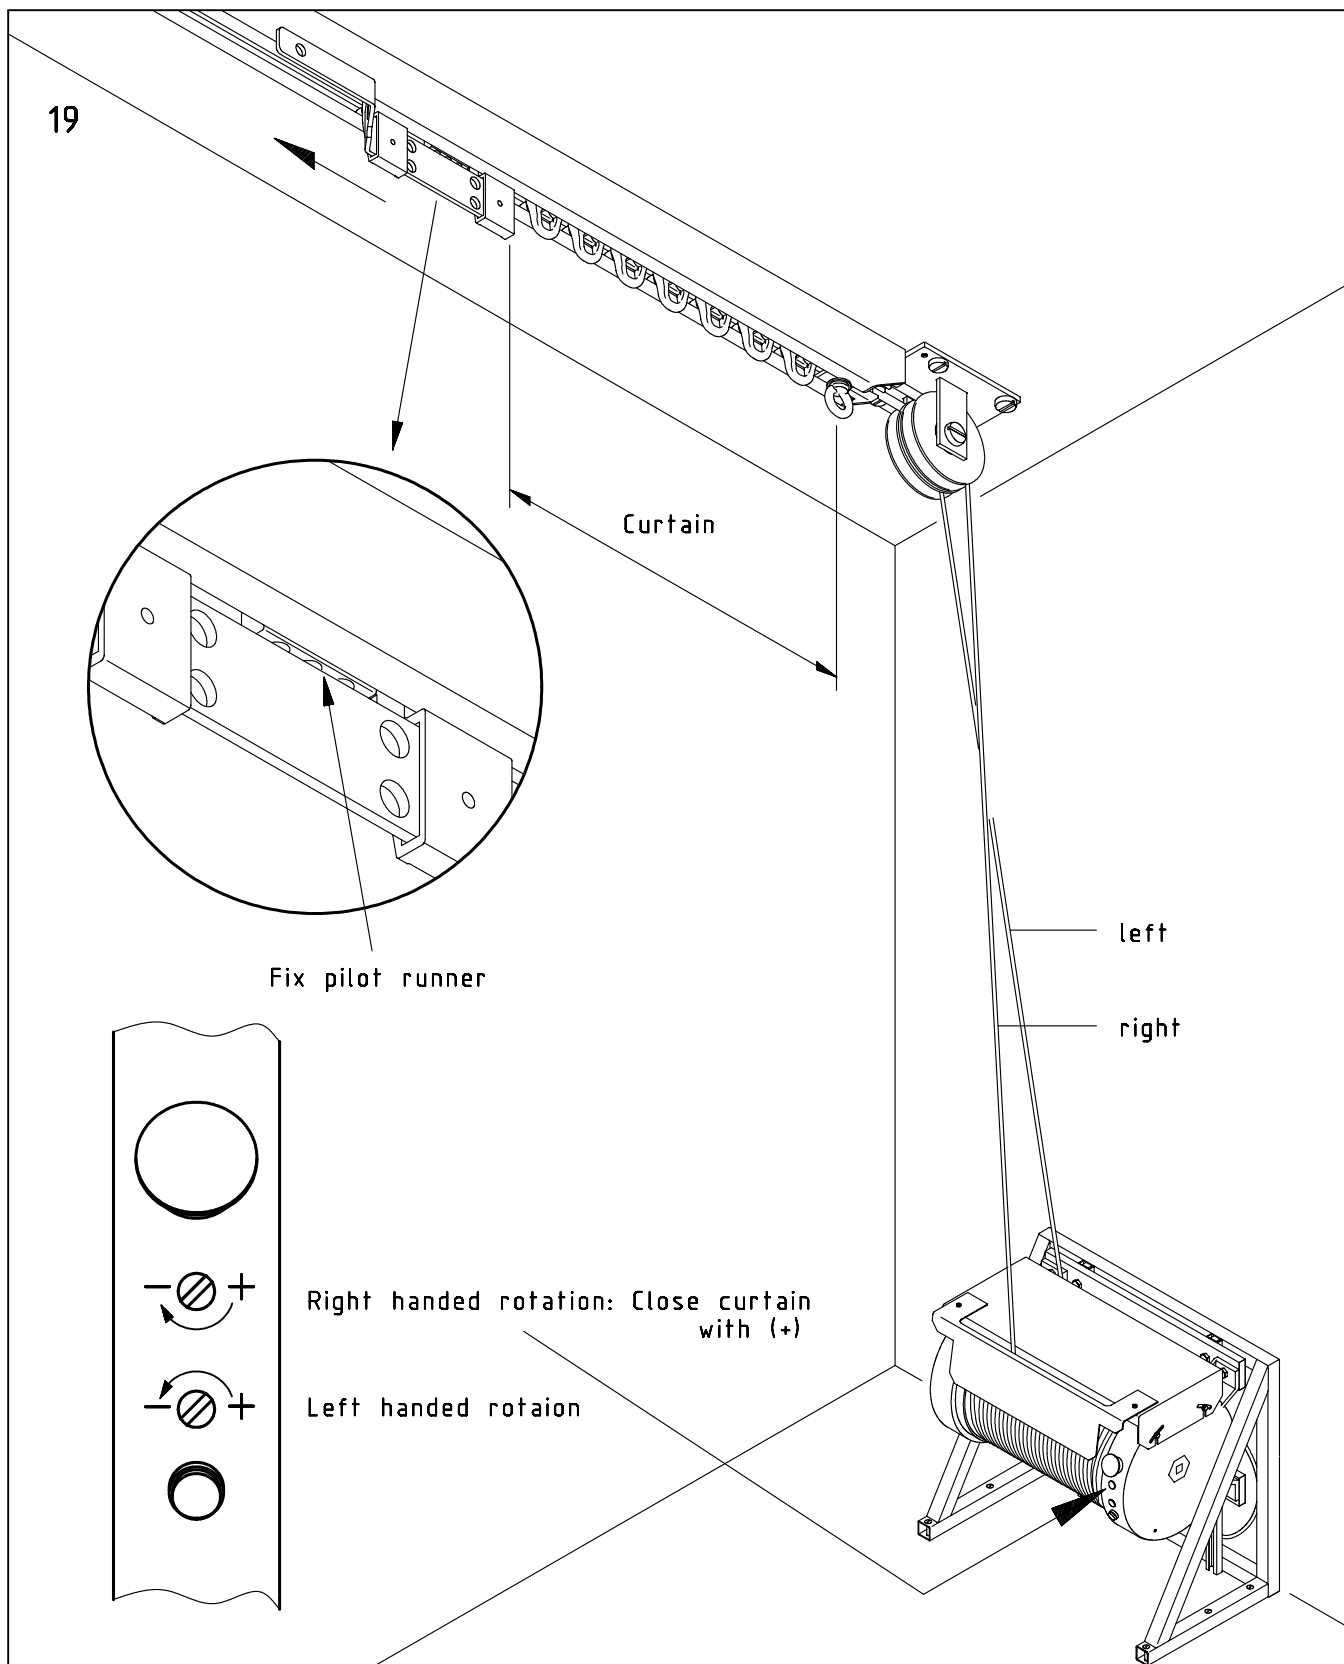

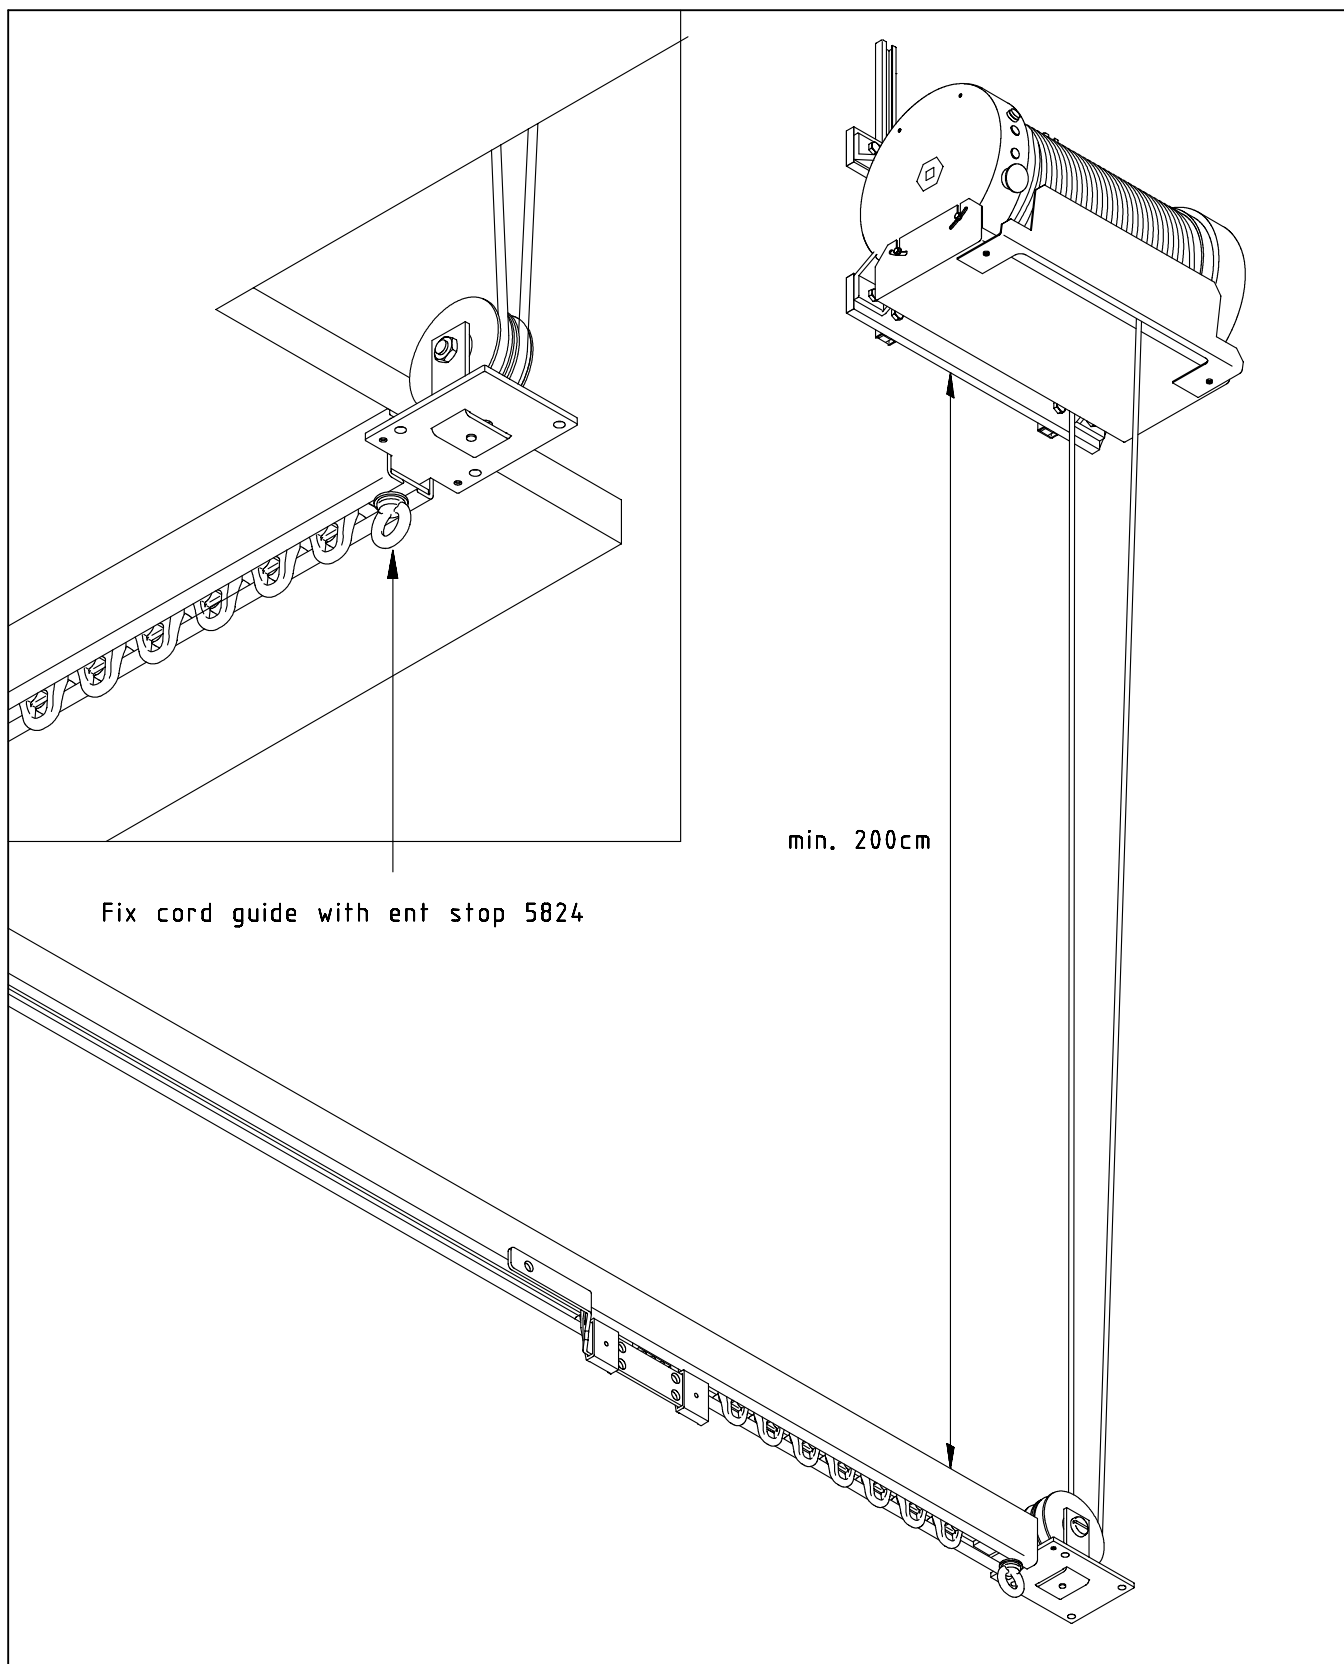


LOAD TABLE

-22-

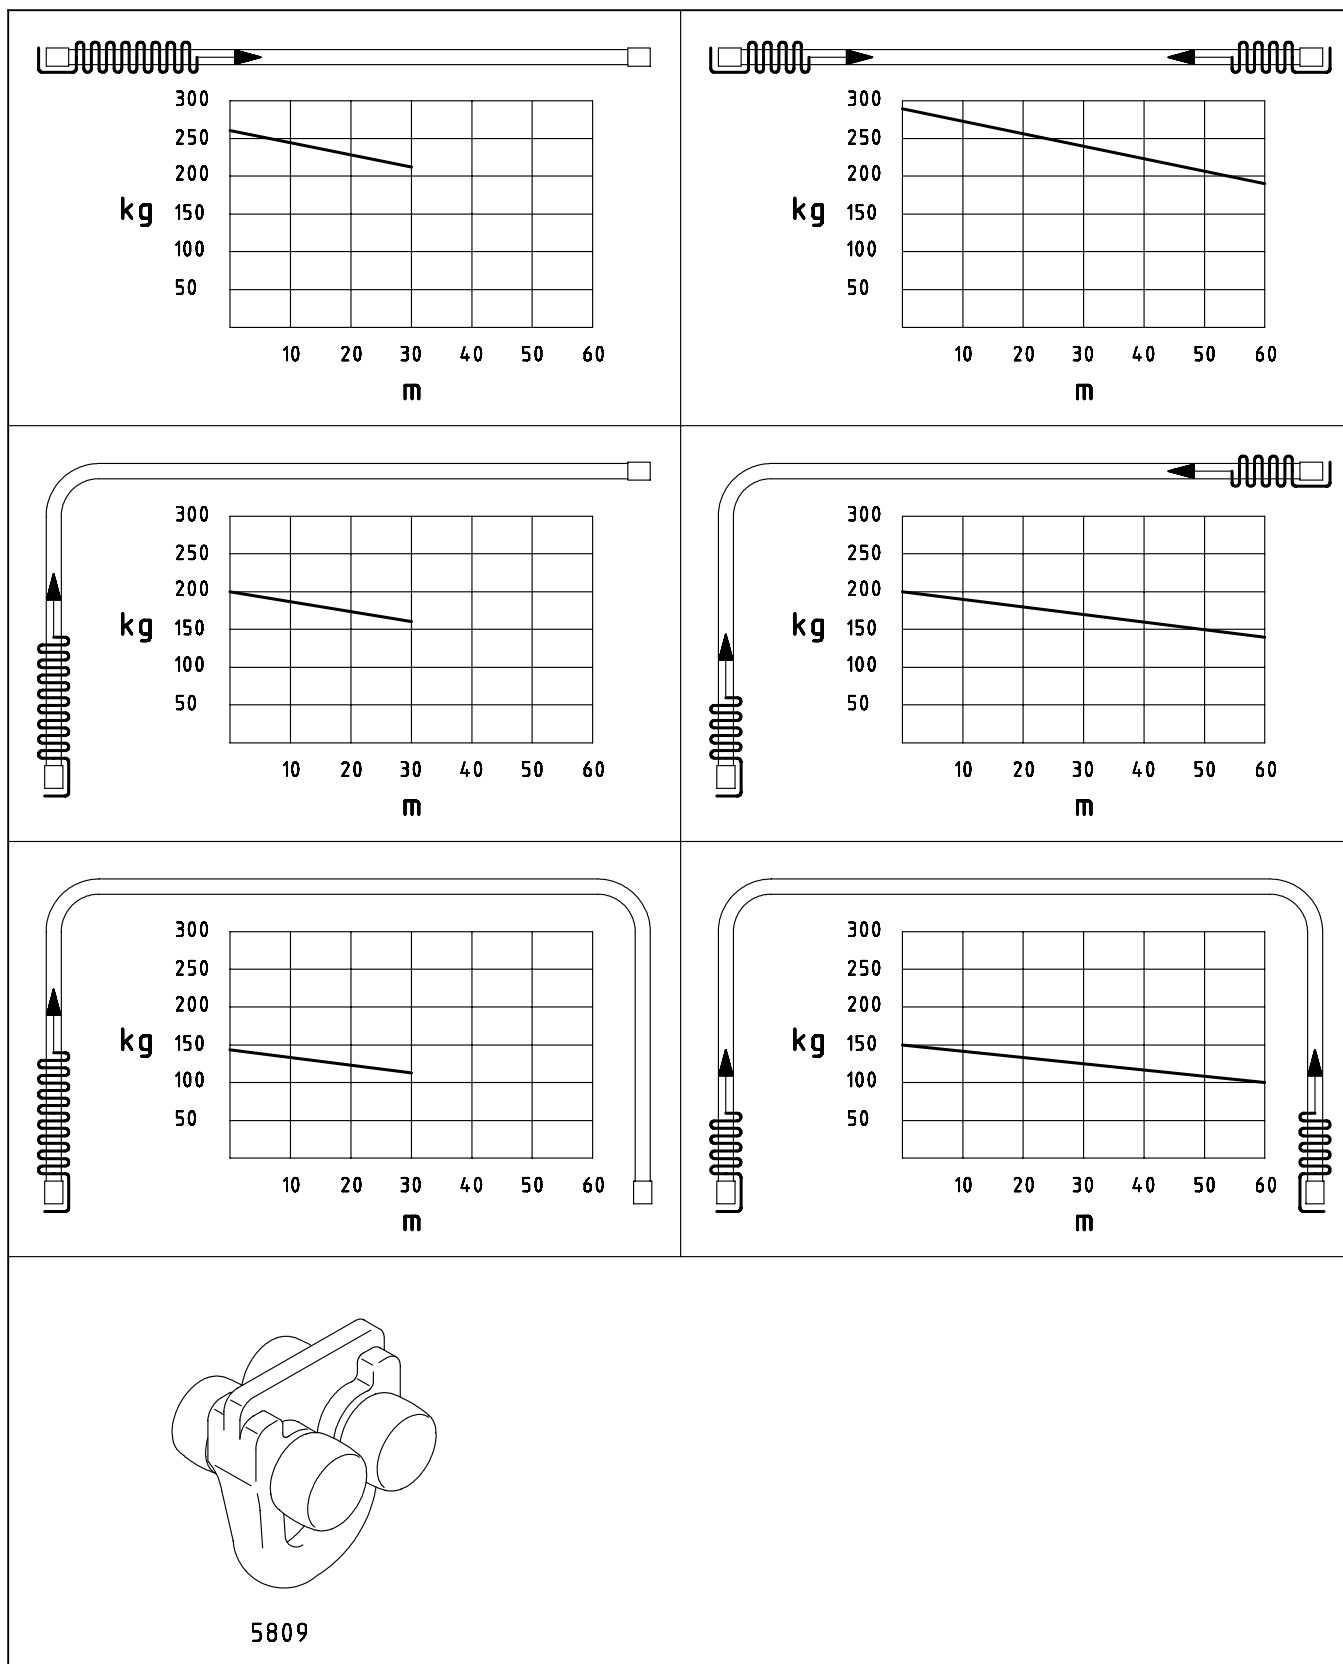


LOAD TABLE

-23-

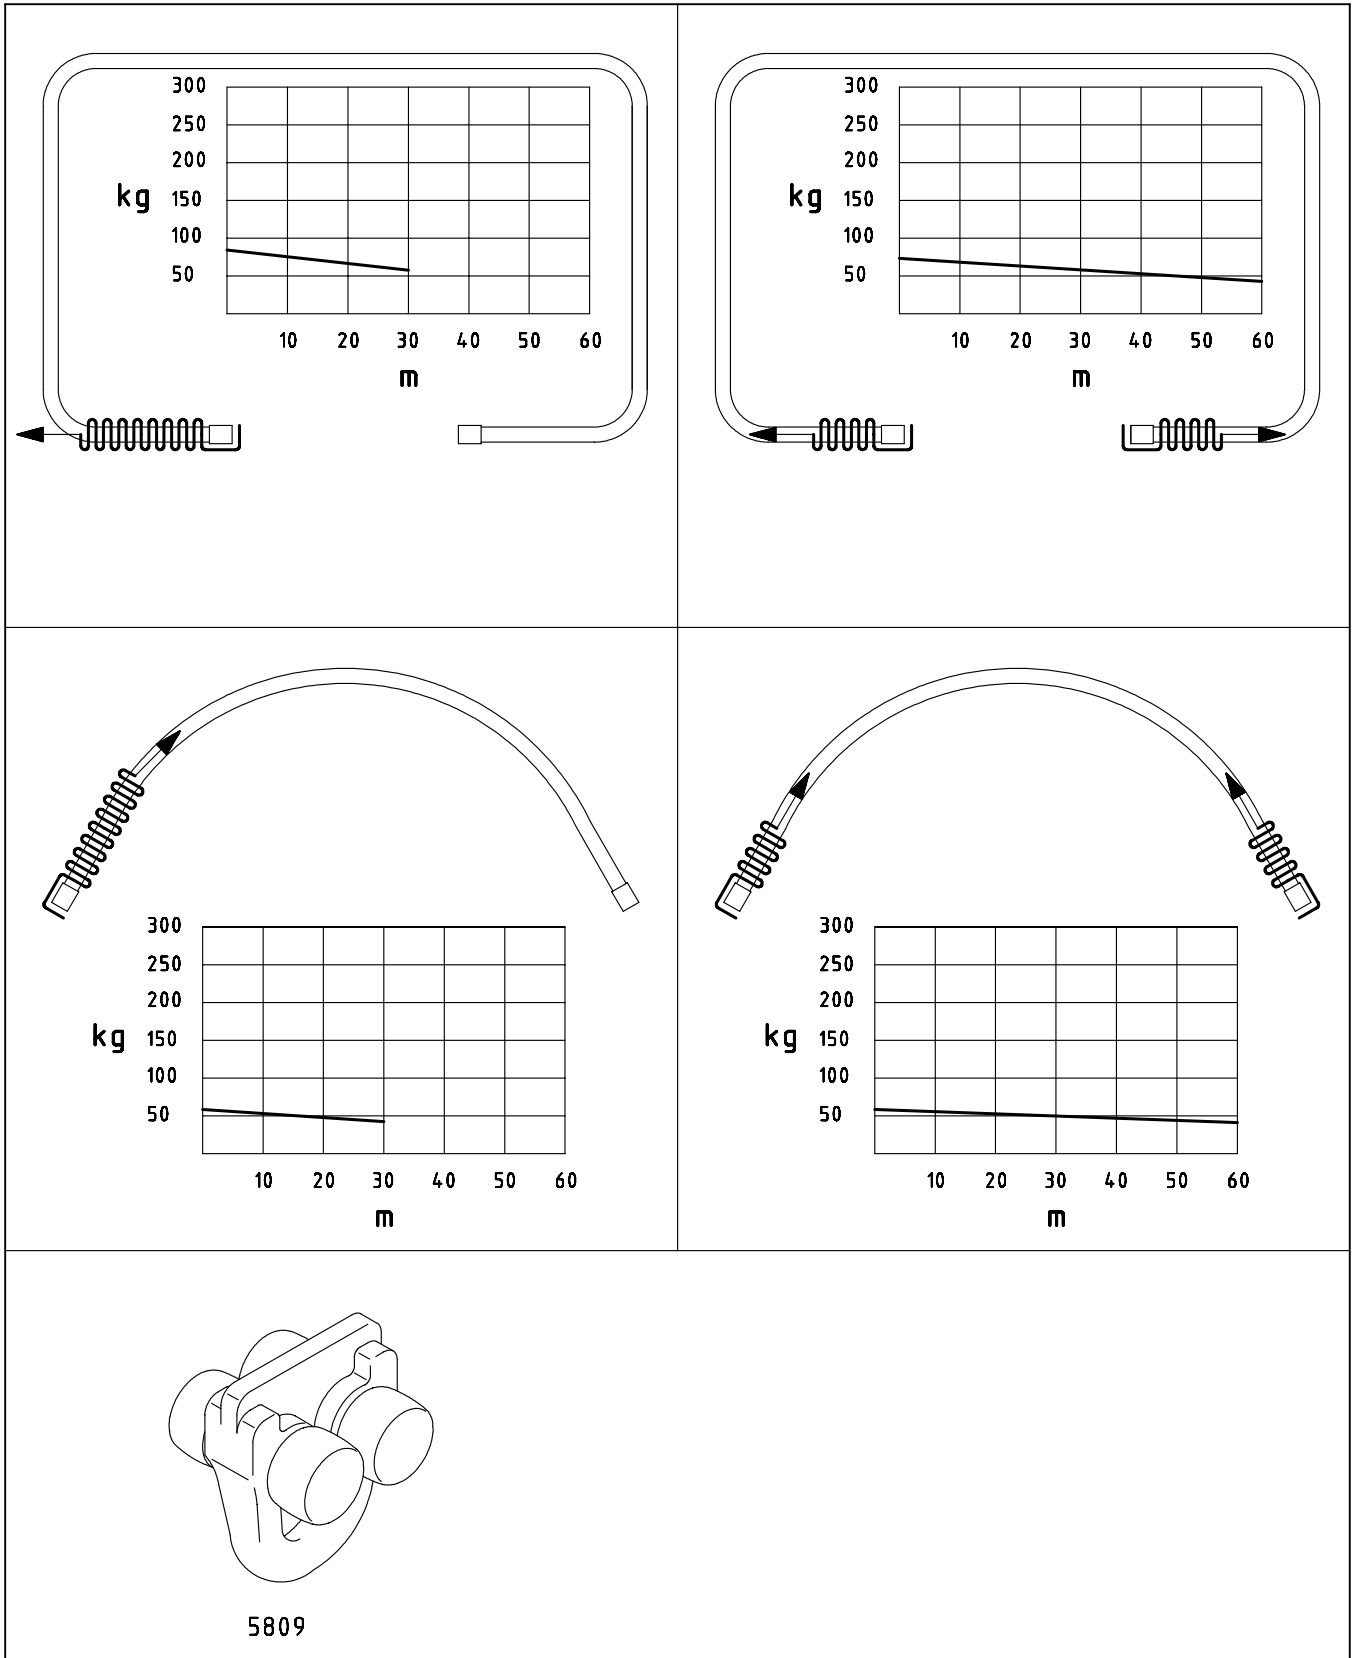

See also Wiring Diagrams E101 & E102

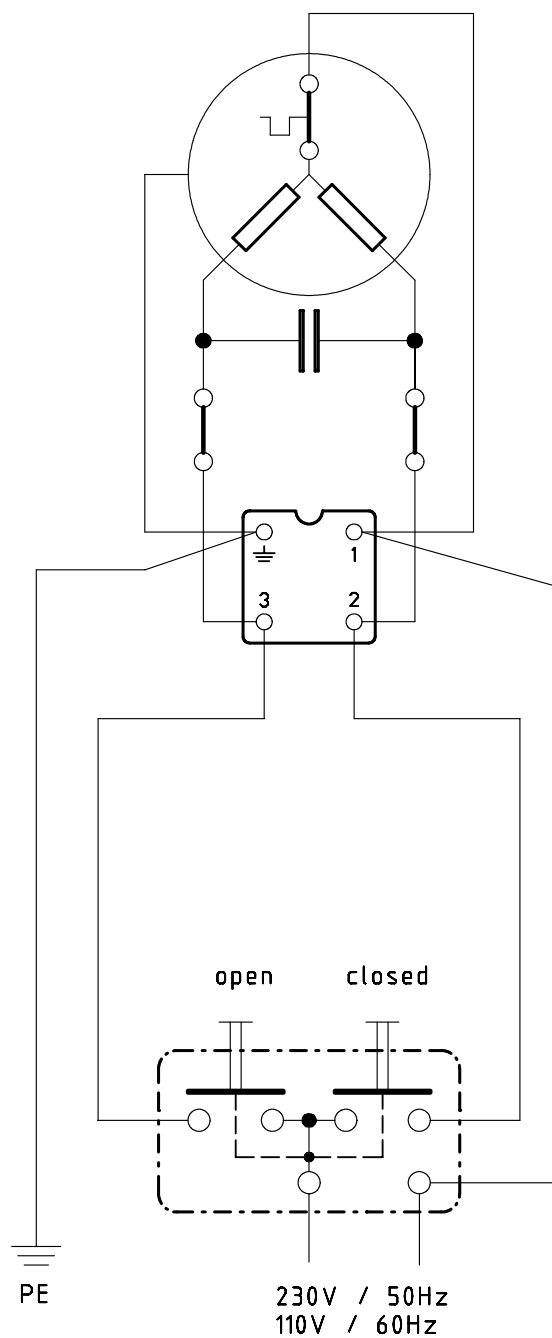

5714