


Roman Blind Cassette System with Somfy Motor



Thank you for selecting our Somfy Motorised Cassette System. We have assembled this blind as specified by you and it only requires minor adjustments once you have attached your roman blind.

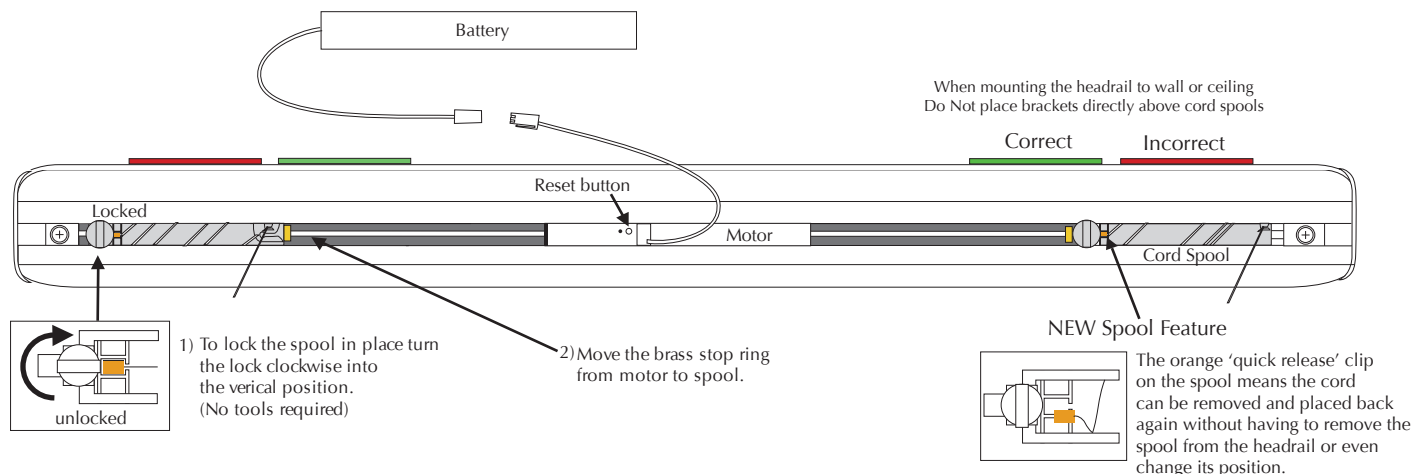


- 1) Unlock the spool as shown above. Slide into position and lock into place. We recommend a maximum cord spacing of 50cm.
- 2) Loosen the two brass stop rings either side of the motor using the allen key. Slide them along the control rod so that they rest against the spools each side of the motor and tighten in place.
- 3) When choosing your bracket position, do not place brackets directly above the spools as this can restrict the rotation of the spool.
- 4) We recommend that all assemblies are rigged, tested and adjusted as necessary before delivering to site.

Clip-on Child Safety Toggle - H700CT

Our Roman Blind Cassette Systems include our Clip-on Safety Toggle (H700CT) designed and developed by Jones Interiors. This exclusive product allows you the freedom to use Brass Rings (H66), Polycarbonate Rings (H362), or Cording Eyelets (H4031) to utilise your preferred method of manufacture. Each Toggle has a maximum lift capacity of 1kg so please consider the number of cords you might need for any heavy blinds. We recommend a maximum spacing of 50cm between cords. These Toggles must be sewn to the lowest cord attachment points across the bottom of your blind (see above diagram). We recommend Güttermann heavy duty core spun thread (A782). We have had all these methods independently tested and verified to BSEN13120:2009+A1:2014.

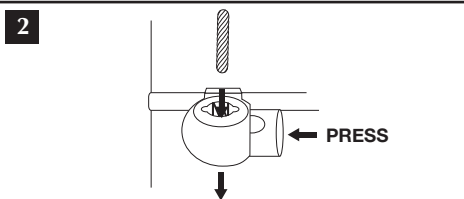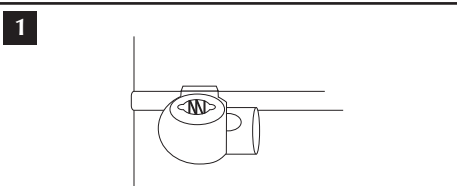

Press the spring loaded button to bring the round hole in line with the centre of the toggle body. The lift cords can now be passed through this hole and adjusted to the desired lengths.

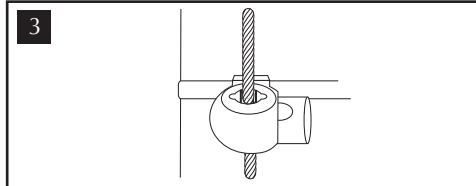

WARNING



Young children can be strangled by the loops, pull cords, chains, tapes & inner cords that operate this product. To avoid strangulation and entanglement, keep cords and chains out of the reach of young children. Cords may become wrapped around a child's neck. Move cots and furniture away from window covering cords and chains. Do not tie cords together. Make sure cords do not twist and create a loop.

The information above is only intended to give general and preliminary guidance to the reader on the General Product Safety Regulations. A full copy of these regulations is available at www.bsigroup.co.uk.

The information should not form the basis upon which the reader makes any decisions or conclusions concerning their own rights or their obligations under the General Product Safety Regulations. Jones & Co (Nottingham) Ltd strongly recommend that the reader obtains detailed and specific legal advice from their own legal counsel concerning their position. Jones & Co (Nottingham) Ltd cannot guarantee that the standards or regulations will not be changed before coming into force, or after having come into force will be subject to change, or how the regulations will be interpreted. Jones & Co (Nottingham) Ltd are not responsible for any errors, omissions, or statements made. Jones & Co (Nottingham) Ltd are not responsible for any loss, howsoever caused, and whether arising directly or indirectly from reliance upon the information and any recommendations provided by Jones Interiors to any reader of this material.

Maximum capacity 3kg. Optional geared control unit available up to 6kg.